


## Muro Surface with photocell and emergency unit

*Muro Surface IP65 1700-3250lm 840 PH E3 Grey*  
0049945



### Product features

- Muro Surface is a wall mounted fixture for exterior lighting applications with 3 hours combined non-maintained emergency unit. Comes with aluminium housing in RAL7016 anthracite grey colour, frosted PC diffuser, IP65, IK10, Class I, 4000K, non-dimmable multipower driver with 5 settings, 1700 / 1900 / 2750 / 3150 / 3250 lm, 16 / 18 / 26 / 29 / 30 W, up to 109 lm/W total system efficacy, switchable built in Mini photocell, CRI80, Asymmetrical beam, 119.000 hrs L70B50 lifespan, 304 x 305 x 155 mm (L x W x D) dimensions, 4.32 kg weight.

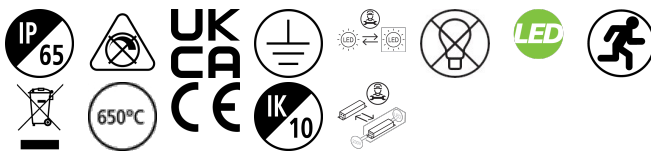


### PRODUCT OVERVIEW

|                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| Product name                    | Muro Surface IP65 1700-3250lm 840 PH E3 Grey                   |
| Technology                      | LED                                                            |
| Cap/Base                        | N/A                                                            |
| Housing                         | Aluminium                                                      |
| Mount                           | Wall surface mounted                                           |
| General application             | Hospitality, Logistics & Industry, Museums & Galleries, Office |
| ETIM Class                      | EC002892                                                       |
| Warranty                        | 5 years                                                        |
| Fixture luminous flux (lm)      | 3250                                                           |
| Luminous flux (lm)              | 3250                                                           |
| Luminaire efficacy (lm/W)       | 108                                                            |
| Colour temperature (K)          | 4000                                                           |
| Light colour                    | Neutral White                                                  |
| CRI (Ra)                        | 80                                                             |
| Colour Variation Initial (SDCM) | SDCM3                                                          |
| Photobiological Risk Group      | RG1                                                            |
| Luminous flux (emergency) (lm)  | 165                                                            |
| Total power consumption (W)     | 30                                                             |
| Electrical protection           | Class I                                                        |
| Control gear type               | LED driver constant current                                    |
| Dimmable                        | No                                                             |
| Dimming method                  | N/A                                                            |
| LED Flickering Rate             | Ultra low (5% or less)                                         |
| Housing colour                  | RAL 7016 - Anthracite                                          |
| IP rating                       | IP65                                                           |
| IK rating                       | IK10                                                           |
| Product EAN number              | 5410288499451                                                  |

### PHOTOMETRY

Muro Surface with photocell and emergency unit  
Muro Surface IP65 1700-3250lm 840 PH E3 Grey  
0049945

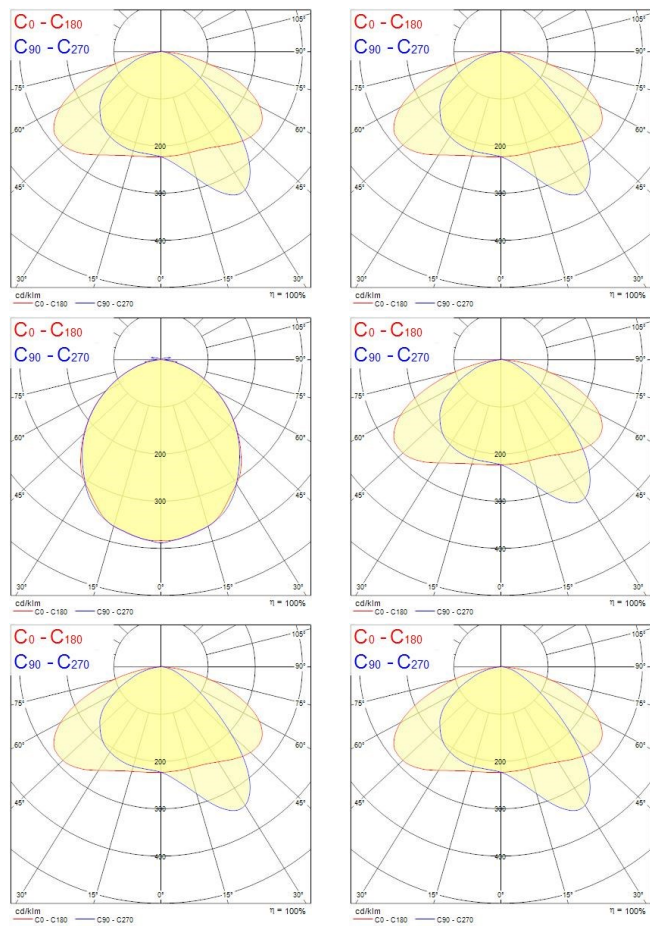

TECHNICAL DRAWINGS

