


Start Flood Flat PIR  
Start Flood Flat IP54 PIR 2850LM 830 Black  
0050137



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2850 lm, 28 W, 102 lm/W, 3000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.575kg. PIR sensor included.

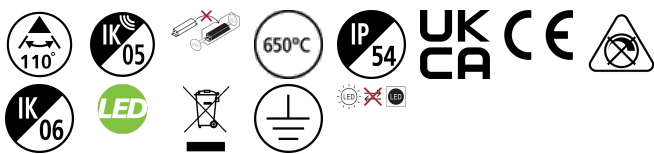


PRODUCT OVERVIEW

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Product name                    | Start Flood Flat IP54 PIR 2850LM 830 Black |
| Technology                      | LED                                        |
| General application             | Residential & Consumer                     |
| ETIM Class                      | EC001744                                   |
| E-number FI                     | 4579541                                    |
| Warranty                        | 3 years                                    |
| Fixture luminous flux (lm)      | 2850                                       |
| Luminaire efficacy (lm/W)       | 102                                        |
| Colour temperature (K)          | 3000                                       |
| Light colour                    | Warm White                                 |
| CRI (Ra)                        | 80                                         |
| Colour Variation Initial (SDCM) | SDCM5                                      |
| Beam Angle (°)                  | 110                                        |
| Photobiological Risk Group      | RG1                                        |
| Total power consumption (W)     | 28.0                                       |
| Electrical protection           | Class I                                    |
| Dimmable                        | No                                         |
| Dimming method                  | N/A                                        |
| LED Flickering Rate             | Low (6% - 20%)                             |
| Housing colour                  | Black                                      |
| IP rating                       | IP54                                       |
| IK rating                       | IK06                                       |
| Product EAN number              | 5410288501376                              |

PHOTOMETRY

**Start Flood Flat PIR**  
*Start Flood Flat IP54 PIR 2850LM 830 Black*  
**0050137**

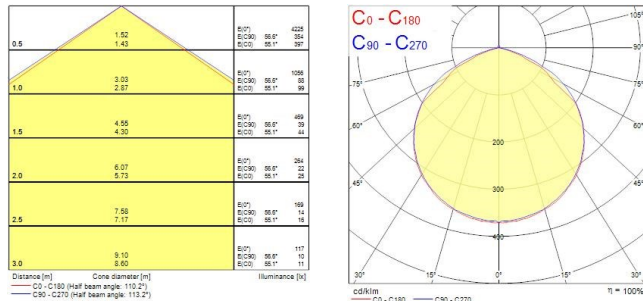

## TECHNICAL DRAWINGS

