


START Downlight Flat Dimmable 226mm Round Surface
Start Downlight Flat 226 1700LM 830 DIM SM
0054128



Product features

- START Downlight Flat DIM Surface is an integrated LED surface mounted downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1700Lm; 100Lm/W; 3000K; IP20.

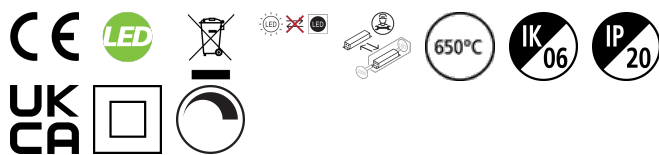


PRODUCT OVERVIEW

Product name	Start Downlight Flat 226 1700LM 830 DIM SM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278503
Warranty	5 years
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK06
Product EAN number	5410288541280

PHOTOMETRY

START Downlight Flat Dimmable 226mm Round Surface
Start Downlight Flat 226 1700LM 830 DIM SM
0054128

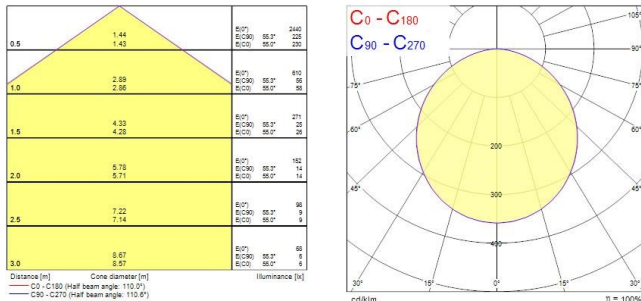

TECHNICAL DRAWINGS

