


Resisto MW  
Resisto 1200 IP66 MWcor 2800lm 840  
0010222



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 20W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; microwave motion sensor corridor function with 10 minutes stand-by time and 10% stand-by level.

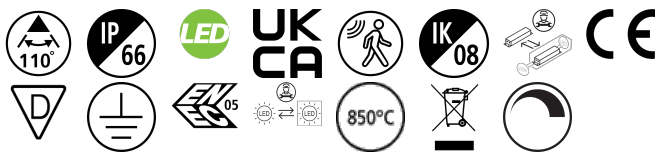


PRODUCT OVERVIEW

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Product name                    | Resisto 1200 IP66 MWcor 2800lm 840              |
| Technology                      | LED                                             |
| Cap/Base                        | N/A                                             |
| Housing                         | PC Polycarbonate                                |
| Mount                           | Ceiling recessed mounting, Wall surface mounted |
| General application             | Logistics & Industry                            |
| ETIM Class                      | EC002892                                        |
| Warranty                        | 5 years                                         |
| Fixture luminous flux (lm)      | 2800                                            |
| Luminaire efficacy (lm/W)       | 140                                             |
| Colour temperature (K)          | 4000                                            |
| CRI (Ra)                        | 80                                              |
| Colour Variation Initial (SDCM) | SDCM5                                           |
| Colour Consistency (SDCM)       | 5                                               |
| Beam Angle (°)                  | 110                                             |
| Glare control                   | < 22                                            |
| Photobiological Risk Group      | RG1                                             |
| Total power consumption (W)     | 20                                              |
| Electrical protection           | Class I                                         |
| Control gear type               | LED driver constant current                     |
| Dimmable                        | Yes                                             |
| Dimming method                  | Other                                           |
| Minimum dimming level (%)       | 1                                               |
| LED Flickering Rate             | Ultra low (5% or less)                          |
| Housing colour                  | Grey                                            |
| IP rating                       | IP66                                            |
| IK rating                       | IK08                                            |
| Product EAN number              | 5410288102221                                   |

PHOTOMETRY

Resisto MW  
Resisto 1200 IP66 MWcor 2800lm 840  
0010222

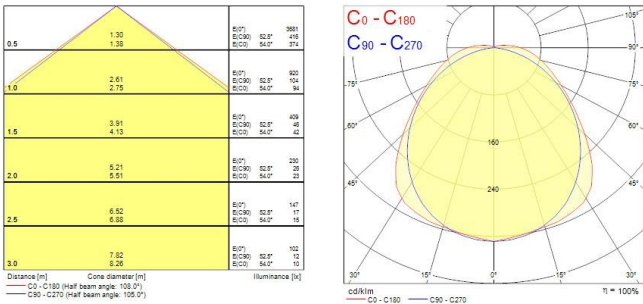

TECHNICAL DRAWINGS

