


Start Downlight 5in1 50-125
START Downlight 5IN1 50-125 1150LM
0053148



Product features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 50mm to 125mm.






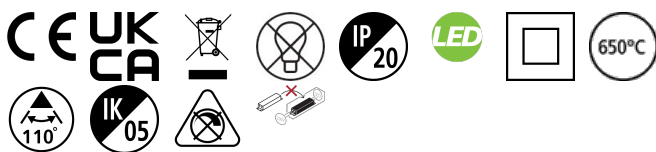


PRODUCT OVERVIEW

Product name	START Downlight 5IN1 50-125 1150LM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278425
Warranty	3 years
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	96
Colour temperature (K)	4000
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK05
Product EAN number	5410288531489

PHOTOMETRY

Start Downlight 5in1 50-125
START Downlight 5IN1 50-125 1150LM
0053148



TECHNICAL DRAWINGS

