


START Downlight Flat IP44 Dimmable 205mm Round Recessed

START eco Downlight Flat 205 IP44 2250lm 840 DIM  
0053944



Product features

- START eco Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate phase dimmable driver and loop in out box; 24W; 2250Lm; 94Lm/W; 4000K; IP44 rated from the front.

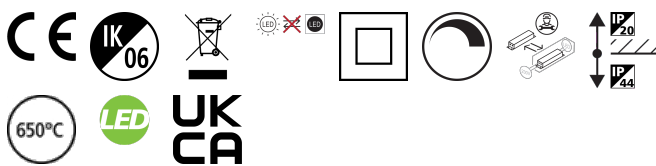


PRODUCT OVERVIEW

|                                 |                                                  |
|---------------------------------|--------------------------------------------------|
| Product name                    | START eco Downlight Flat 205 IP44 2250lm 840 DIM |
| Technology                      | LED                                              |
| Housing                         | Aluminium                                        |
| Mount                           | Ceiling recessed mounting                        |
| General application             | Hospitality                                      |
| ETIM Class                      | EC001744                                         |
| Warranty                        | 3 years                                          |
| Fixture luminous flux (lm)      | 2250                                             |
| Luminaire efficacy (lm/W)       | 94                                               |
| Colour temperature (K)          | 4000                                             |
| Light colour                    | Neutral White                                    |
| CRI (Ra)                        | 80                                               |
| Colour Variation Initial (SDCM) | SDCM5                                            |
| Beam Angle (°)                  | 120                                              |
| Glare control                   | < 28                                             |
| Photobiological Risk Group      | RG0                                              |
| Total power consumption (W)     | 24                                               |
| Electrical protection           | Class II                                         |
| Control gear type               | LED driver constant current                      |
| Dimmable                        | Yes                                              |
| Dimming method                  | Mains: leading / trailing edge                   |
| LED Flickering Rate             | Ultra low (5% or less)                           |
| Housing colour                  | RAL 9003 - Signal white                          |
| IP rating                       | IP44/20                                          |
| IK rating                       | IK06                                             |
| Product EAN number              | 5410288539447                                    |

PHOTOMETRY

START Downlight Flat IP44 Dimmable 205mm Round Recessed

START eco Downlight Flat 205 IP44 2250lm 840 DIM  
0053944

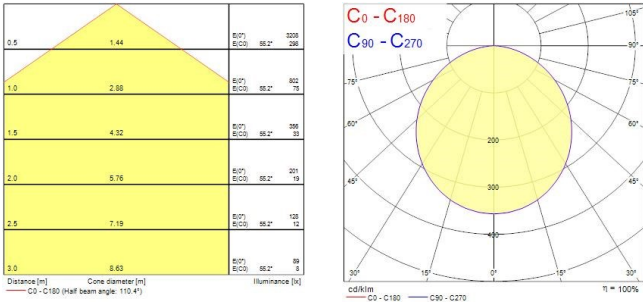

TECHNICAL DRAWINGS

