


ART.: 3111598

SL713+ PL MP S/C

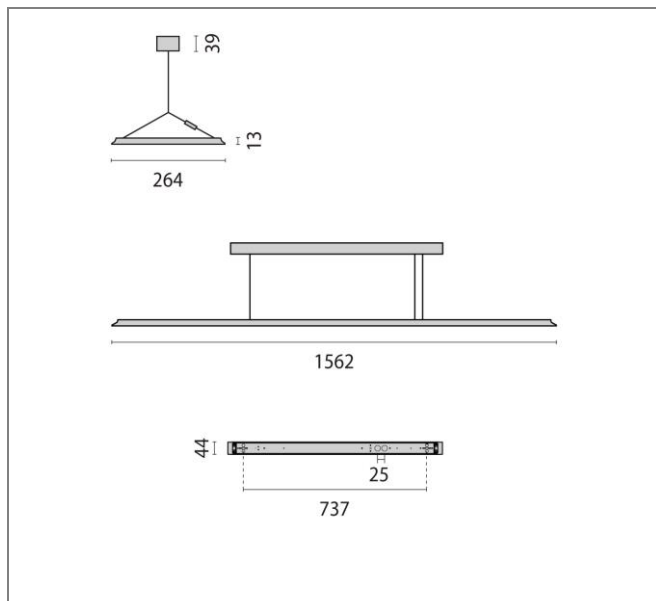

Art.: 3111598, SL713+ PL RXL 61 S/C 840 GR9006 DALI MP, Suspended, LED luminaire for indoor, comprising: Extruded aluminium housing profile, powder-coated. Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Light engine can be replaced by means of a slide-in mechanism. Direct / indirect light distribution. VDU application suitable acc. to EN 12464-1. Colour rendering index $R_a > 80$. Colour tolerance according to MacAdam ≤ 3 SDCM. Dimmable via TouchDIM®. DALI dimmable. Complete with steel suspension cable (1.5 m), transparent power cord and canopy. Special colour versions available. Consult factory.

Connected load	69 W
Luminous flux	9010 lm
Efficiency	131 lm/W
Colour temperature	4000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	GR-RAL9006
UGR	≤ 16
Glare control	✓

