


**ART.: 818711264001**

DLSB185 LED OPAL COVER - 95 mm

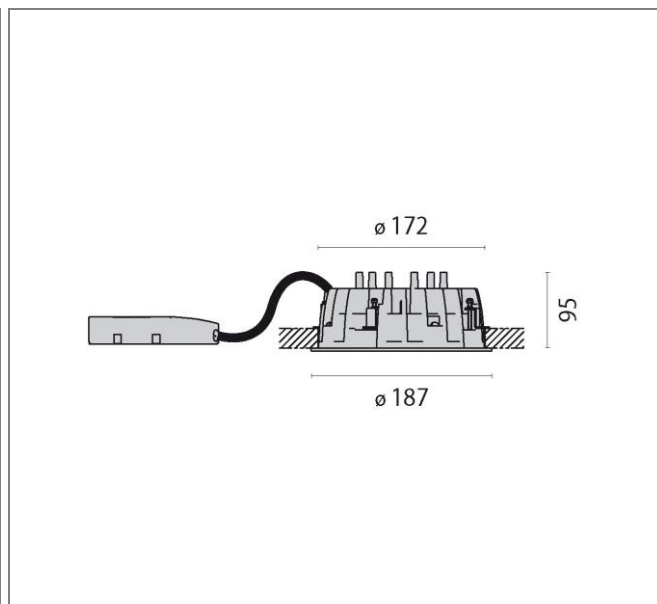

Art.: 818711264001, DLSB185 LED, Opal-white pmma diffuser, 12W, 4000K, Driver dali, Symmetrical - direct, White, Recessed round LED downlight for indoors, consisting of: / Multi-purpose die-cast aluminium housing combines all functions: heat-sinking, ceiling trim, ceiling brackets and gear tray connection / Light-tight housing / Suitable for ceiling tile thickness from 1-25 mm / Recessed frosted diffuser for optimal light distribution and high homogeneity / White modular reflector, ABS injection-molded with light-tight connection of LED board / Excellent heat dissipation through die-cast aluminium heat sink with FAST (Flexible Air Stream) Technology / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Dimmable via TouchDIM® / Complete with electric converter / DALI dimmable / Protection class IP54 (for light emission surface for installation in closed ceilings)

|                               |             |
|-------------------------------|-------------|
| <b>Connected load</b>         | 12 W        |
| <b>Luminous flux</b>          | 1350 lm     |
| <b>Efficiency</b>             | 112 lm/W    |
| <b>Colour temperature</b>     | 4000K       |
| <b>Colour rendering (CRI)</b> | 80          |
| <b>IP class</b>               | 20          |
| <b>Nominal voltage</b>        | 220 – 240 V |
| <b>Colour</b>                 | WH-RAL9016  |
| <b>UGR</b>                    | 22,9        |

