



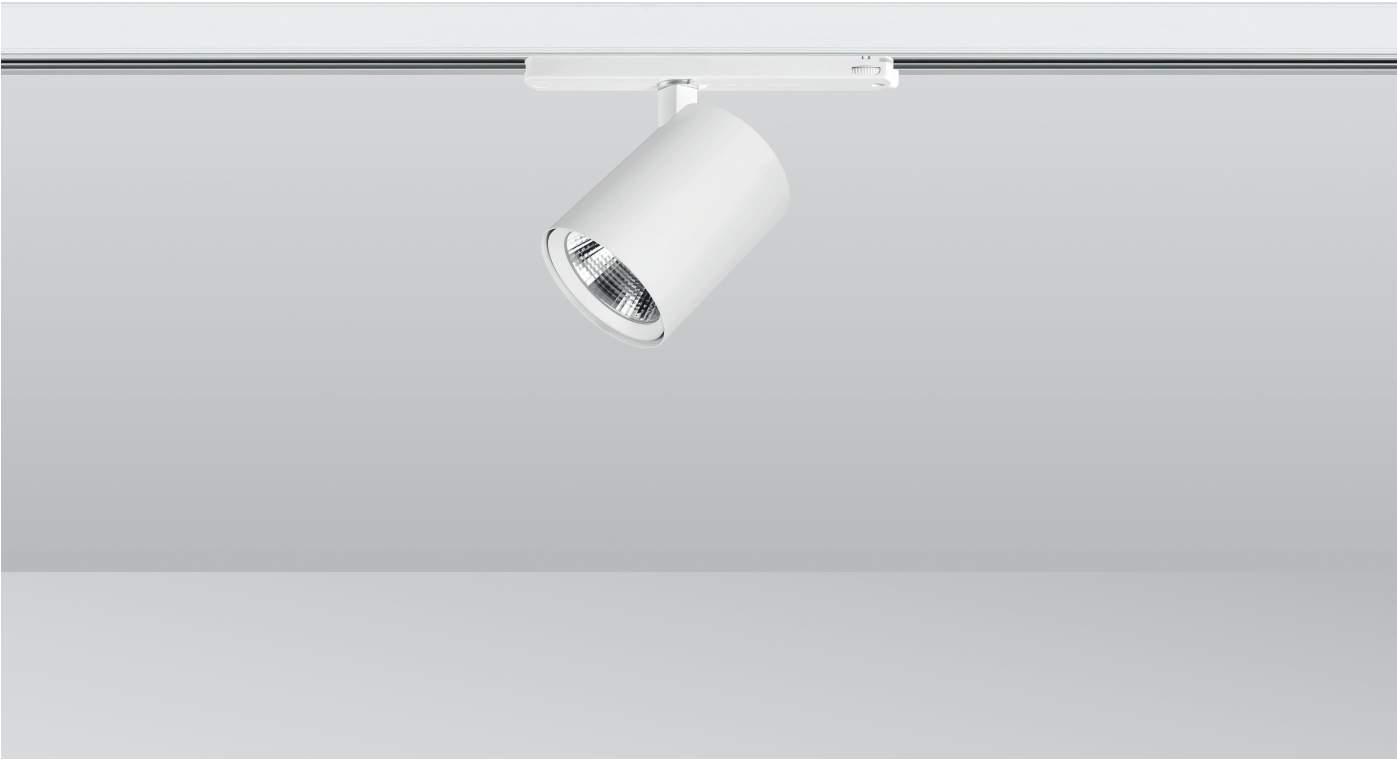



Pinta In-track

3-Phase Track Light


Also available



LED Power	from 11.5W up to 36.1W	from 11.5W up to 36.1W	from 11.2W up to 31.6W	from 11.5W up to 36.1W
CRI	>80Ra	>90Ra		
CCT	3000K	3000K	3500K	4000K
LED Lumen	from 2054lm up to 5754lm	from 1702lm up to 4866lm	from 1701lm up to 4184lm	from 1836lm up to 5241lm
LED Efficacy	up to 179lm/W	up to 148lm/W	up to 153lm/W	up to 160lm/W
Driver	Non-Dimmable Driver (included)			

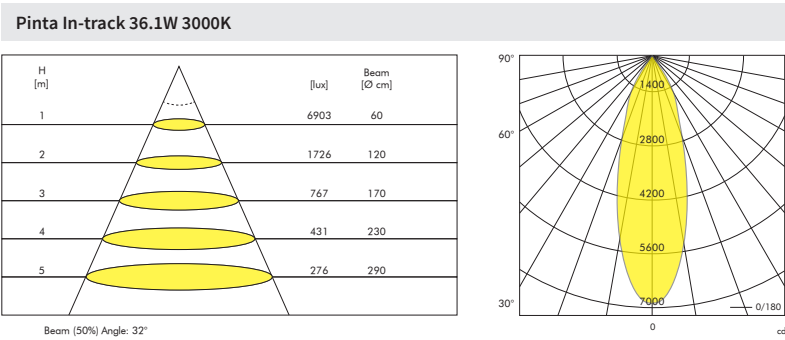

PRODUCT LIST									
Pinta In-track model	Driver	LED Lumen	Reflector	CRI >80Ra / CCT 3000K			CRI >90Ra / CCT 3000K		
				Grey	White	Black	Grey	White	Black
Cost Efficient	350mA	1702lm	15°				2.17.3088	2.17.3092	2.17.3096
Cost Efficient	350mA	1702lm	24°				2.17.3089	2.17.3093	2.17.3097
Cost Efficient	350mA	1702lm	36°				2.17.3090	2.17.3094	2.17.3098
Cost Efficient	350mA	1702lm	60°				2.17.3091	2.17.3095	2.17.3099
Cost Efficient	350mA	2054lm	15°	2.17.3064	2.17.3068	2.17.3072			
Cost Efficient	350mA	2054lm	24°	2.17.3065	2.17.3069	2.17.3073			
Cost Efficient	350mA	2054lm	36°	2.17.3066	2.17.3070	2.17.3074			
Cost Efficient	350mA	2054lm	60°	2.17.3067	2.17.3071	2.17.3075			
Cost Efficient	500mA	2394lm	15°				2.17.3100	2.17.3104	2.17.3108
Cost Efficient	500mA	2394lm	24°				2.17.3101	2.17.3105	2.17.3109
Cost Efficient	500mA	2394lm	36°				2.17.3102	2.17.3106	2.17.3110
Cost Efficient	500mA	2394lm	60°				2.17.3103	2.17.3107	2.17.3111
Energy Efficient	500mA	2513lm	15°				2.17.3172	2.17.3176	2.17.3180
Energy Efficient	500mA	2513lm	24°				2.17.3173	2.17.3177	2.17.3181
Energy Efficient	500mA	2513lm	36°				2.17.3174	2.17.3178	2.17.3182
Energy Efficient	500mA	2513lm	60°				2.17.3175	2.17.3179	2.17.3183
Cost Efficient	500mA	2890lm	15°	2.17.3076	2.17.3080	2.17.3084			
Cost Efficient	500mA	2890lm	24°	2.17.3077	2.17.3081	2.17.3085			
Cost Efficient	500mA	2890lm	36°	2.17.3078	2.17.3082	2.17.3086			
Cost Efficient	500mA	2890lm	60°	2.17.3079	2.17.3083	2.17.3087			
Energy Efficient	500mA	2970lm	15°	2.17.3160	2.17.3164	2.17.3168			
Energy Efficient	500mA	2970lm	24°	2.17.3161	2.17.3165	2.17.3169			
Energy Efficient	500mA	2970lm	36°	2.17.3162	2.17.3166	2.17.3170			
Energy Efficient	500mA	2970lm	60°	2.17.3163	2.17.3167	2.17.3171			
Cost Efficient	700mA	3238lm	15°				2.17.2703	2.17.2707	2.17.2711
Cost Efficient	700mA	3238lm	24°				2.17.2704	2.17.2708	2.17.2712
Cost Efficient	700mA	3238lm	36°				2.17.2705	2.17.2709	2.17.2713
Cost Efficient	700mA	3238lm	60°				2.17.2706	2.17.2710	2.17.2714
Energy Efficient	700mA	3491lm	15°				2.17.2811	2.17.2815	2.17.2819
Energy Efficient	700mA	3491lm	24°				2.17.2812	2.17.2816	2.17.2820
Energy Efficient	700mA	3491lm	36°				2.17.2813	2.17.2817	2.17.2821
Energy Efficient	700mA	3491lm	60°				2.17.2814	2.17.2818	2.17.2822
Cost Efficient	700mA	3911lm	15°	2.17.2679	2.17.2683	2.17.2687			
Cost Efficient	700mA	3911lm	24°	2.17.2680	2.17.2684	2.17.2688			
Cost Efficient	700mA	3911lm	36°	2.17.2681	2.17.2685	2.17.2689			
Cost Efficient	700mA	3911lm	60°	2.17.2682	2.17.2686	2.17.2690			
Energy Efficient	700mA	4092lm	15°	2.17.2775	2.17.2779	2.17.2783			
Energy Efficient	700mA	4092lm	24°	2.17.2776	2.17.2780	2.17.2784			
Energy Efficient	700mA	4092lm	36°	2.17.2777	2.17.2781	2.17.2785			
Energy Efficient	700mA	4092lm	60°	2.17.2778	2.17.2782	2.17.2786			
Cost Efficient	900mA	3976lm	15°				2.17.2715	2.17.2719	2.17.2723
Cost Efficient	900mA	3976lm	24°				2.17.2716	2.17.2720	2.17.2724
Cost Efficient	900mA	3976lm	36°				2.17.2717	2.17.2721	2.17.2725
Cost Efficient	900mA	3976lm	60°				2.17.2718	2.17.2722	2.17.2726

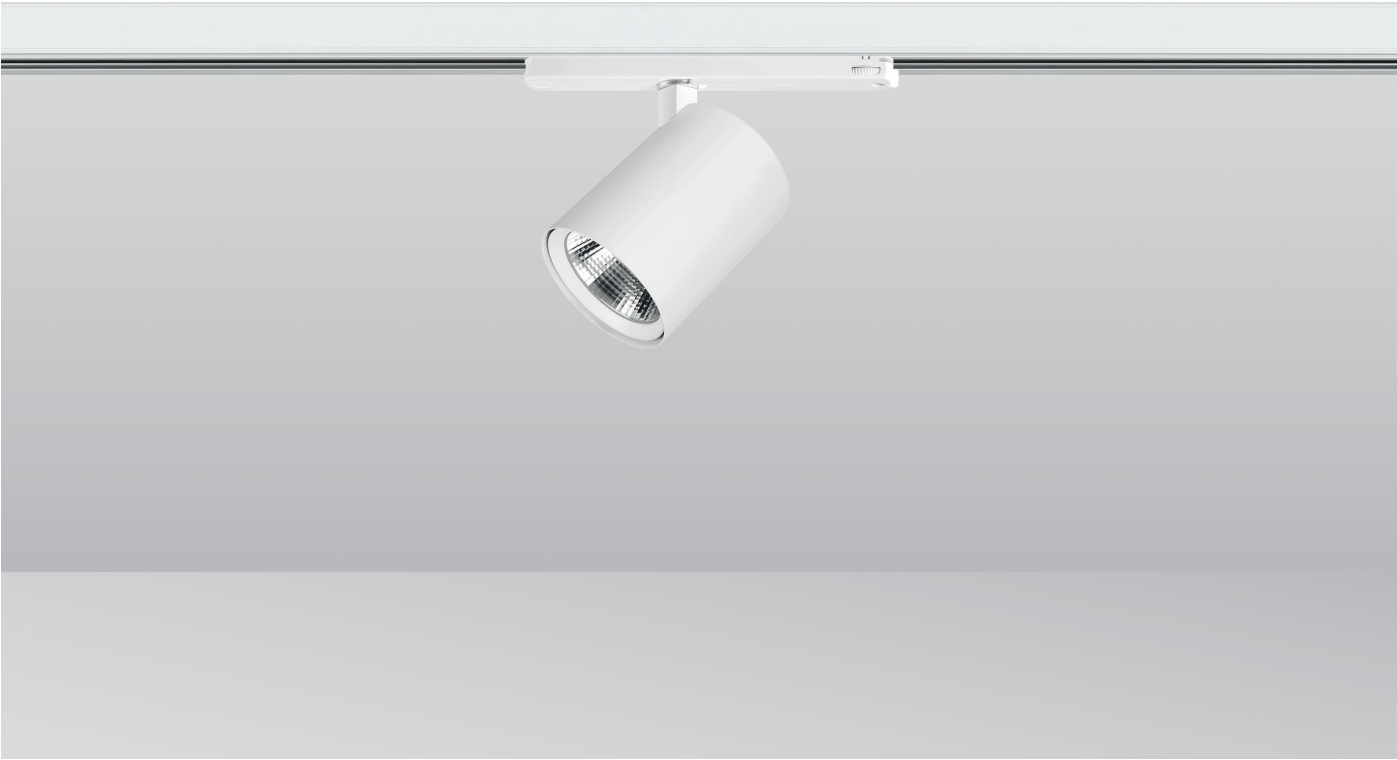


Pinta In-track

3-Phase Track Light

Also available


- HIGH CRI
>90Ra
- FASHION
modules
- FOOD
modules
- CUSTOM
specs



PRODUCT LIST									
Pinta In-track model	Driver	LED Lumen	Reflector	CRI >80Ra / CCT 3000K			CRI >90Ra / CCT 3000K		
				Grey	White	Black	Grey	White	Black
Cost Efficient	900mA	4803lm	15°	2.17.2691	2.17.2695	2.17.2699			
Cost Efficient	900mA	4803lm	24°	2.17.2692	2.17.2696	2.17.2700			
Cost Efficient	900mA	4803lm	36°	2.17.2693	2.17.2697	2.17.2701			
Cost Efficient	900mA	4803lm	60°	2.17.2694	2.17.2698	2.17.2702			
Energy Efficient	900mA	4305lm	15°				2.17.2823	2.17.2827	2.17.2831
Energy Efficient	900mA	4305lm	24°				2.17.2824	2.17.2828	2.17.2832
Energy Efficient	900mA	4305lm	36°				2.17.2825	2.17.2829	2.17.2833
Energy Efficient	900mA	4305lm	60°				2.17.2826	2.17.2830	2.17.2834
Energy Efficient	900mA	5091lm	15°	2.17.2787	2.17.2791	2.17.2795			
Energy Efficient	900mA	5091lm	24°	2.17.2788	2.17.2792	2.17.2796			
Energy Efficient	900mA	5091lm	36°	2.17.2789	2.17.2793	2.17.2797			
Energy Efficient	900mA	5091lm	60°	2.17.2790	2.17.2794	2.17.2798			
Energy Efficient	1050mA	4866lm	15°				2.17.2835	2.17.2839	2.17.2843
Energy Efficient	1050mA	4866lm	24°				2.17.2836	2.17.2840	2.17.2844
Energy Efficient	1050mA	4866lm	36°				2.17.2837	2.17.2841	2.17.2845
Energy Efficient	1050mA	4866lm	60°				2.17.2838	2.17.2842	2.17.2846

PRODUCT LIST									
Pinta In-track model	Driver	LED Lumen	Reflector	CRI >80Ra / CCT 3000K			CRI >90Ra / CCT 3000K		
				Grey	White	Black	Grey	White	Black
Energy Efficient	1050mA	5754Lm	15°	2.17.2799	2.17.2803	2.17.2807			
Energy Efficient	1050mA	5754Lm	24°	2.17.2800	2.17.2804	2.17.2808			
Energy Efficient	1050mA	5754Lm	36°	2.17.2801	2.17.2805	2.17.2809			
Energy Efficient	1050mA	5754Lm	60°	2.17.2802	2.17.2806	2.17.2810			
Energy Efficient PW	500mA	2513lm	15°				2.17.3184	2.17.3188	2.17.3192
Energy Efficient PW	500mA	2513lm	24°				2.17.3185	2.17.3189	2.17.3193
Energy Efficient PW	500mA	2513lm	36°				2.17.3186	2.17.3190	2.17.3194
Energy Efficient PW	500mA	2513lm	60°				2.17.3187	2.17.3191	2.17.3195
Cost Efficient PW	700mA	3238Lm	15°				2.17.2727	2.17.2731	2.17.2735
Cost Efficient PW	700mA	3238Lm	24°				2.17.2728	2.17.2732	2.17.2736
Cost Efficient PW	700mA	3238Lm	36°				2.17.2729	2.17.2733	2.17.2737
Cost Efficient PW	700mA	3238Lm	60°				2.17.2730	2.17.2734	2.17.2738
Energy Efficient PW	700mA	3461Lm	15°				2.17.2847	2.17.2851	2.17.2855
Energy Efficient PW	700mA	3461Lm	24°				2.17.2848	2.17.2852	2.17.2856
Energy Efficient PW	700mA	3461Lm	36°				2.17.2849	2.17.2853	2.17.2857
Energy Efficient PW	700mA	3461Lm	60°				2.17.2850	2.17.2854	2.17.2858
Cost Efficient PW	900mA	3976Lm	15°				2.17.2739	2.17.2743	2.17.2747
Cost Efficient PW	900mA	3976Lm	24°				2.17.2740	2.17.2744	2.17.2748
Cost Efficient PW	900mA	3976Lm	36°				2.17.2741	2.17.2745	2.17.2749
Cost Efficient PW	900mA	3976Lm	60°				2.17.2742	2.17.2746	2.17.2750
Energy Efficient PW	900mA	4305Lm	15°				2.17.2859	2.17.2863	2.17.2867
Energy Efficient PW	900mA	4305Lm	24°				2.17.2860	2.17.2864	2.17.2868
Energy Efficient PW	900mA	4305Lm	36°				2.17.2861	2.17.2865	2.17.2869
Energy Efficient PW	900mA	4305Lm	60°				2.17.2862	2.17.2866	2.17.2870
Energy Efficient PW	1050mA	4866Lm	15°				2.17.2871	2.17.2875	2.17.2879
Energy Efficient PW	1050mA	4866Lm	24°				2.17.2872	2.17.2876	2.17.2880
Energy Efficient PW	1050mA	4866Lm	36°				2.17.2873	2.17.2877	2.17.2881
Energy Efficient PW	1050mA	4866Lm	60°				2.17.2874	2.17.2878	2.17.2882

PRODUCT LIST									
Pinta In-track model	Driver	LED Lumen	Reflector	CRI >90Ra / CCT 3500K			CRI >90Ra / CCT 4000K		
				Grey	White	Black	Grey	White	Black
Cost Efficient PW	350mA	1836lm	15°				2.17.3124	2.17.3128	2.17.3132
Cost Efficient PW	350mA	1836lm	24°				2.17.3125	2.17.3129	2.17.3133
Cost Efficient PW	350mA	1836lm	36°				2.17.3126	2.17.3130	2.17.3134
Cost Efficient PW	350mA	1836lm	60°				2.17.3127	2.17.3131	2.17.3135
Cost Efficient PW	350mA	1701lm	15°	2.17.3112	2.17.3116	2.17.3120			
Cost Efficient PW	350mA	1701lm	24°	2.17.3113	2.17.3117	2.17.3121			
Cost Efficient PW	350mA	1701lm	36°	2.17.3114	2.17.3118	2.17.3122			
Cost Efficient PW	350mA	1701lm	60°	2.17.3115	2.17.3119	2.17.3123			
Cost Efficient PW	500mA	2583lm	15°				2.17.3148	2.17.3152	2.17.3156
Cost Efficient PW	500mA	2583lm	24°				2.17.3149	2.17.3153	2.17.3157
Cost Efficient PW	500mA	2583lm	36°				2.17.3150	2.17.3154	2.17.3158
Cost Efficient PW	500mA	2583lm	60°				2.17.3151	2.17.3155	2.17.3159

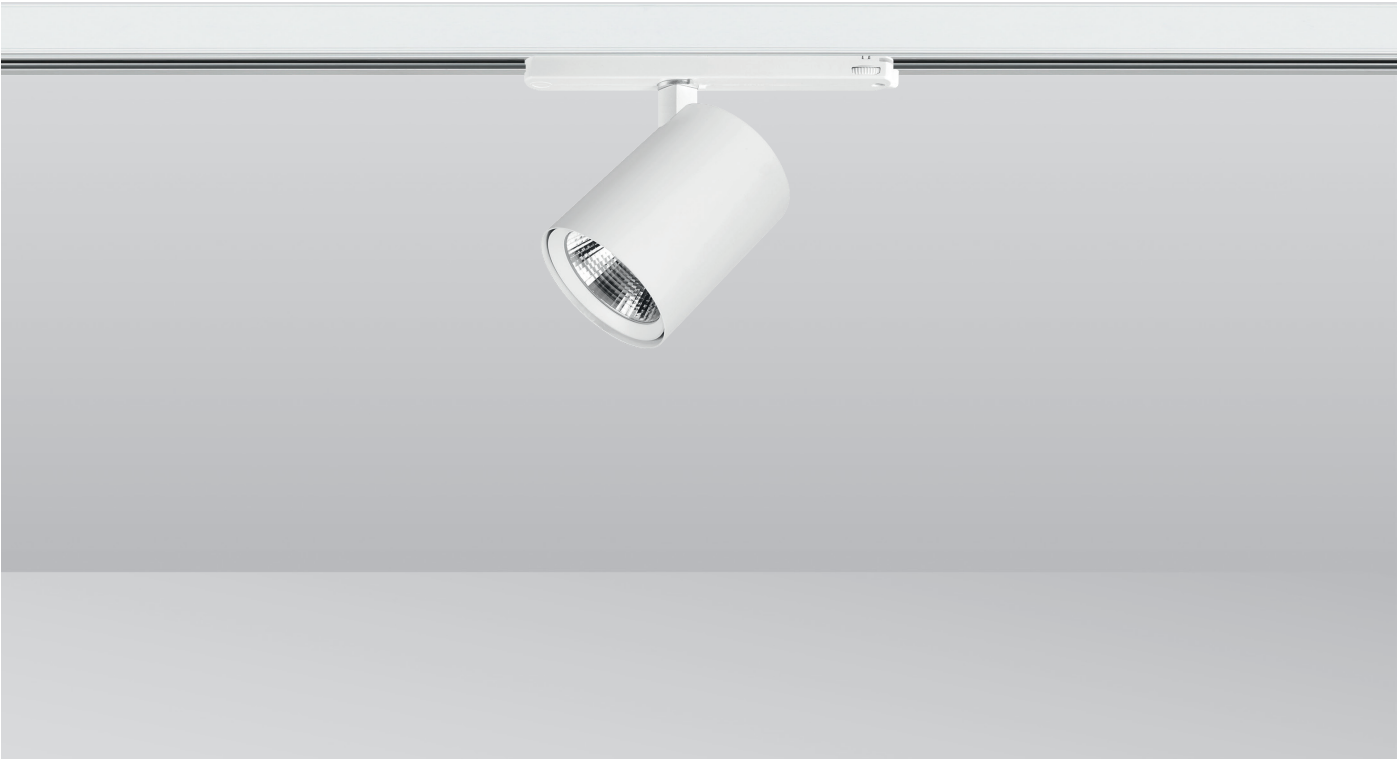


Pinta In-track

3-Phase Track Light


Also available

- HIGH CRI >90Ra
- FASHION modules
- FOOD modules
- CUSTOM specs



PRODUCT LIST									
Pinta In-track model	Driver	LED Lumen	Reflector	CRI >90Ra / CCT 3500K			CRI >90Ra / CCT 4000K		
				Grey	White	Black	Grey	White	Black
Energy Efficient PW	500mA	2705lm	15°				2.17.3196	2.17.3200	2.17.3204
Energy Efficient PW	500mA	2705lm	24°				2.17.3197	2.17.3201	2.17.3205
Energy Efficient PW	500mA	2705lm	36°				2.17.3198	2.17.3202	2.17.3206
Energy Efficient PW	500mA	2705lm	60°				2.17.3199	2.17.3203	2.17.3207
Cost Efficient PW	500mA	2393lm	15°	2.17.3136	2.17.3140	2.17.3144			
Cost Efficient PW	500mA	2393lm	24°	2.17.3137	2.17.3141	2.17.3145			
Cost Efficient PW	500mA	2393lm	36°	2.17.3138	2.17.3142	2.17.3146			
Cost Efficient PW	500mA	2393lm	60°	2.17.3139	2.17.3143	2.17.3147			
Cost Efficient PW	700mA	3406Lm	15°	2.17.2920	2.17.2924	2.17.2928			
Cost Efficient PW	700mA	3406Lm	24°	2.17.2921	2.17.2925	2.17.2929			
Cost Efficient PW	700mA	3406Lm	36°	2.17.2922	2.17.2926	2.17.2930			
Cost Efficient PW	700mA	3406Lm	60°	2.17.2923	2.17.2927	2.17.2931			
Cost Efficient PW	700mA	3495Lm	15°				2.17.2751	2.17.2755	2.17.2759
Cost Efficient PW	700mA	3495Lm	24°				2.17.2752	2.17.2756	2.17.2760
Cost Efficient PW	700mA	3495Lm	36°				2.17.2753	2.17.2757	2.17.2761
Cost Efficient PW	700mA	3495Lm	60°				2.17.2754	2.17.2758	2.17.2762

PRODUCT LIST									
Pinta In-track model	Driver	LED Lumen	Reflector	CRI >90Ra / CCT 3500K			CRI >90Ra / CCT 4000K		
				Grey	White	Black	Grey	White	Black
Energy Efficient PW	700mA	3727Lm	15°				2.17.2883	2.17.2887	2.17.2891
Energy Efficient PW	700mA	3727Lm	24°				2.17.2884	2.17.2888	2.17.2892
Energy Efficient PW	700mA	3727Lm	36°				2.17.2885	2.17.2889	2.17.2893
Energy Efficient PW	700mA	3727Lm	60°				2.17.2886	2.17.2890	2.17.2894
Cost Efficient PW	900mA	4184Lm	15°	2.17.2932	2.17.2936	2.17.2940			
Cost Efficient PW	900mA	4184Lm	24°	2.17.2933	2.17.2937	2.17.2941			
Cost Efficient PW	900mA	4184Lm	36°	2.17.2934	2.17.2938	2.17.2942			
Cost Efficient PW	900mA	4184Lm	60°	2.17.2935	2.17.2939	2.17.2943			
Cost Efficient PW	900mA	4293Lm	15°				2.17.2763	2.17.2767	2.17.2772
Cost Efficient PW	900mA	4293Lm	24°				2.17.2764	2.17.2768	2.17.2773
Cost Efficient PW	900mA	4293Lm	36°				2.17.2765	2.17.2769	2.17.2774
Cost Efficient PW	900mA	4293Lm	60°				2.17.2766	2.17.2770	
Energy Efficient PW	900mA	4637Lm	15°				2.17.2895	2.17.2899	2.17.2903
Energy Efficient PW	900mA	4637Lm	24°				2.17.2896	2.17.2900	2.17.2904
Energy Efficient PW	900mA	4637Lm	36°				2.17.2897	2.17.2901	2.17.2905
Energy Efficient PW	900mA	4637Lm	60°				2.17.2898	2.17.2902	2.17.2906
Energy Efficient PW	1050mA	5241Lm	15°				2.17.2907	2.17.2911	2.17.2915
Energy Efficient PW	1050mA	5241Lm	24°				2.17.2908	2.17.2912	2.17.2916
Energy Efficient PW	1050mA	5241Lm	36°				2.17.2909	2.17.2913	2.17.2917
Energy Efficient PW	1050mA	5241Lm	60°				2.17.2910	2.17.2914	2.17.2918



AVAILABLE BEAM ANGLES	
Article No.	Description
5.14.0193	Reflector 15° for Pinta In-track
5.14.0194	Reflector 24° for Pinta In-track
5.14.0195	Reflector 36° for Pinta In-track
5.14.0196	Reflector 60° for Pinta In-track
ALSO AVAILABLE	
Article No.	Description
See page 186	3-Phase Tracks and accessories