

Product data sheet

Item No. 92.207.6003.1

Cable assembly GST18I4KSB- 15 60SW

geis® Connection cable female - free end; length: 6m; type GST18I4; 4-pole; 250/400 V / 16 A; colour of coding: black with black strain-relief; cable: H05VV-F 4G1,5, colour: black



Item No.	92.207.6003.1
EAN	4015573700208
Order Unit	10 Piece(s)

Certificates / Approvals



Technical data

General

Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 1
Interlockable	Yes
Color of coding/ contact carrier	Black
Marking of poles	
Color of housing inclusive strain relief	Black

Model

Number of poles	4
Nominal cross section conductor	1.5 mm ²
Degree of protection (IP)	IP40
Wire strip length	9 mm
sheath strip length	35 mm
Preparation of conductor ends	Ultrasonically compressed wire ends
Cable type	H05VV-F

Cable colour	Black
Cable diameter	9.2 mm
Version of cable	Female - free end
Type of cord set	Connection cable
Version cable end 1	GST18i4 socket
Version cable end 2	Free end


Material

Surface finish	Tin-plated
Halogen free	No
Continuous temperature of cable	70 °C
Insulation components continuous temperature	100 °C

Dimensions

Total length	6 m
--------------	-----

Technical drawing

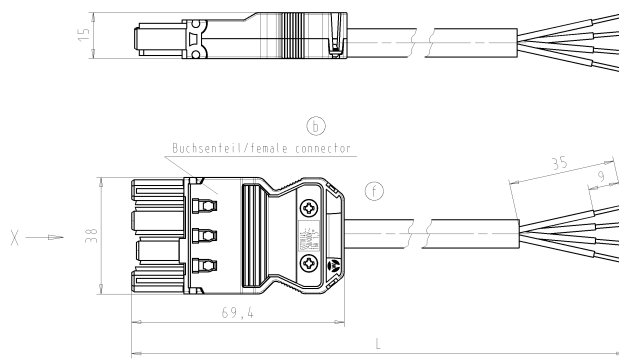

Kabel/cable: H05VV-F4G1,5
Farbe/colour: siehe Tabelle/see table

Pol	Aderfarbe
pole	colour of core
L2	schwarz / black
N	blau / blue
⊕	grün-gelb / green-yellow
L1	braun / brown

.F	Farbe	Codierung	Kabelfarbe / cable colour
	colour	*X* Buchse	Zugentlastungsfarbe/strain relief colour
		Female	
.1	schwarz	2 N PE 1	schwarz
.2	weiß		weiß
.3	grau	2 N PE 1	schwarz
	grey		black

Teile-Nr. / **part-no.** **L** **Beispiel (Farbe: schwarz)** / **example (colour: black)** **Typ** / **type**
 92.207.XX03.F XX in dm-Schritten 92.207.1003.1 = 10dm/L = 1000mm GST18i4KSB- 15 10SW
 U2.207.XX03.F XX in m-Schritten U2.207.1203.1 = 12 m/L=12000mm GST18i4KSB- 15 X10SW

Weitere Daten siehe Katalog / **further data see catalog**

Typ/type: GST18i4KSB- 15 SW = schwarz/black WS = weiß/white GR01 = grau/grey

PRE-ASSEMBLED CABLE KONFERT-LEITUNG
 Buchse/female freies Ende/free end 1,5mm
 Schraubanschluß/screw connection 250V