

## Product data sheet

Item No. 92.232.0504.2

### Cable assembly

geis® Connection cable male - free end; length: 0,5m; type GST18I3; 3-pole; 250 V / 16 A; colour of coding: white with white strain-relief; cable: H05VV-F 3G1,5, colour: white



|            |               |
|------------|---------------|
| Item No.   | 92.232.0504.2 |
| EAN        | 4015573319943 |
| Order Unit | 100 Piece(s)  |

### Certificates / Approvals



### Technical data

#### General

|                                          |        |
|------------------------------------------|--------|
| Rated current                            | 16 A   |
| Rated voltage                            | 250 V  |
| Rated impulse voltage                    | 4 kV   |
| Pollution degree                         | 2      |
| Mechanical coding                        | Code 1 |
| Interlockable                            | Yes    |
| Color of coding/ contact carrier         | White  |
| Marking of poles                         |        |
| Color of housing inclusive strain relief | White  |

#### Model

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Number of poles                 | 3                                   |
| Nominal cross section conductor | 1.5 mm²                             |
| Degree of protection (IP)       | IP40                                |
| Wire strip length               | 9 mm                                |
| sheath strip length             | 37 mm                               |
| Preparation of conductor ends   | Ultrasonically compressed wire ends |
| Cable type                      | H05VV-F                             |

|                     |                  |
|---------------------|------------------|
| Cable colour        | White            |
| Cable diameter      | 8.3 mm           |
| Version of cable    | Male - free end  |
| Type of cord set    | Connection cable |
| Version cable end 1 | GST18i3 plug     |
| Version cable end 2 | Free end         |


#### Material

|                                              |            |
|----------------------------------------------|------------|
| Surface finish                               | Tin-plated |
| Halogen free                                 | No         |
| Continuous temperature of cable              | 70 °C      |
| Insulation components continuous temperature | 100 °C     |

#### Dimensions

|              |       |
|--------------|-------|
| Total length | 0.5 m |
|--------------|-------|

#### Technical drawing

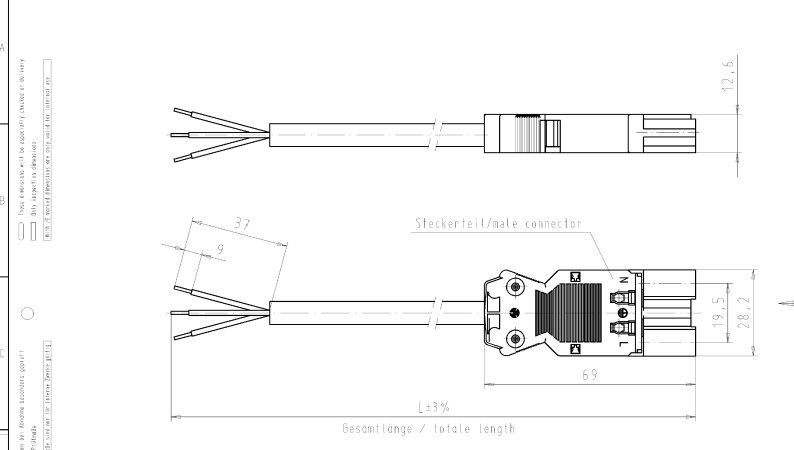

Kabel/cable H05VV-F3G1,5  
Farbe/colour: siehe Tabelle/see table

Steckerteil/male connector

Gesamtlänge / totale length

| .F | Farbe<br>colour  | Codierung<br>Stacker<br>male | Kabelfarbe<br>cable colour |
|----|------------------|------------------------------|----------------------------|
| .1 | schwarz<br>black | L R N                        | schwarz<br>black           |
| .2 | weiß<br>white    | L R N                        | weiß<br>white              |
| .3 | grau<br>grey     | L R N                        | schwarz<br>black           |
| .5 | rot<br>red       | L R N                        | schwarz<br>black           |

| Teile-Nr.<br>part-no. | L                  | Beispiel (Farbe: schwarz)<br>example (colour: black) | Typ<br>type          |
|-----------------------|--------------------|------------------------------------------------------|----------------------|
| 92.232.XX04.F         | XX in dm-Schritten | 92.232.1004.1 = 10dm/L = 1000mm                      | GST18i3K1-S 15 10SW  |
| U2.232.XX04.F         | XX in m-Schritten  | U2.232.1204.1 = 12 m/L=12000mm                       | GST18i3K1-S 15 X12SW |

Typ/type: GST18i3K1-S 15 ..  
 SW = schwarz/black  
 WS = weiß/white  
 GR01 = grau/grey  
 RT03 = rot/red

Further data see catalog  
further data see catalog

Wieland

INSTALL COUPLER  
KONFEKT LEITUNG  
Stecker/male = free end/free end 1.5mm  
Crimpsführung/crimpsversion K1 250V