

Product data sheet

Item No. 92.238.1500.1

Cable assembly

geis® Extension cable female - male; length: 1,5m; type GST18I3; 3-pole; 250 V / 20 A; colour of coding: black with black strain-relief; cable: H05VV-F 3G2,5, colour: black



Item No.	92.238.1500.1
EAN	4015573359222
Order Unit	40 Piece(s)

Certificates / Approvals



Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 1
Interlockable	Yes
Color of coding/ contact carrier	Black
Marking of poles	
Color of housing inclusive strain relief	Black

Model

Number of poles	3
Nominal cross section conductor	2.5 mm ²
Degree of protection (IP)	IP40
Cable type	H05VV-F
Cable colour	Black
Cable diameter	10.2 mm
Version of cable	Female - male

Type of cord set	Connecting cable
Version cable end 1	GST18i3 socket
Version cable end 2	GST18i3 plug


Material

Surface finish	Tin-plated
Halogen free	No
Continuous temperature of cable	70 °C
Insulation components continuous temperature	100 °C

Dimensions

Total length	1.5 m
--------------	-------

Technical drawing

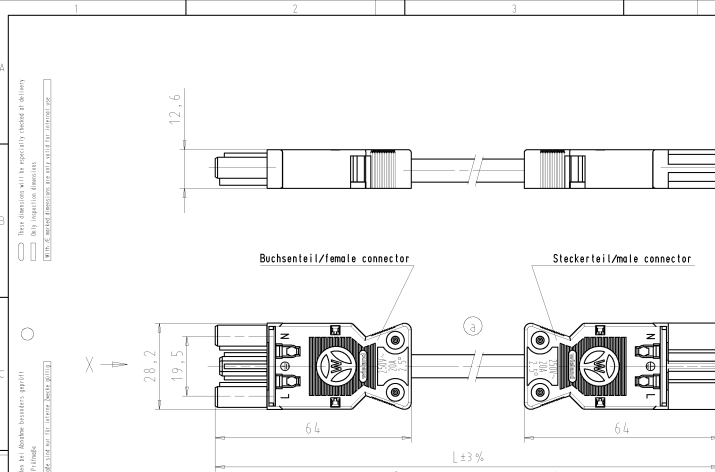

Buchse/teil/female connector

Stecker/teil/male connector

Gesamtlänge / total length

Kabel/cable: H05VV-F3G2,5
Farbe/colour: siehe Tabelle/see table

.F	Farbe colour	Codierung •X• Buchse female	Codierung •Y• Stecker male	Kabelfarbe cable colour
.1	schwarz black			schwarz black
.2	weiß white			weiß white
.3	grau grey			schwarz black
.5	rot red			schwarz black

Teile-Nr.
part-no.

L	Beispiel (Farbe: schwarz) example (colour: black)	Typ type
92.238.XX00.F	XX in dm-Schritten 92.238.1000.1 = 10dm/L = 1000mm	GST18i3K1BS 25 10SW
U2.238.XX00.F	XX in m-Schritten U2.238.1200.1 = 12 m/L = 12000mm	GST18i3K1BS 25 X12SW

Typ/type: GST18i3K1BS 25 ..

SW = schwarz/black
WS = weiß/white
GR01 = grau/grey
RT03 = rot/red

Freiwillig nach
General tolerance

ISO - Zeichnung, keine numerischen Abänderungen
ISO - drawing, no numerical modifications allowed

1. Vorwerkung:
First Use:

Zeichnung Nr./Drawing No.

92.238.0200.1 01K

Index

PRE-ASSEMBLED CABLE
KONFEKT-LEITUNG

Buchse/female-Stecker/male Crimpversion K1
250V AC 20A 2,5mm