

Product data sheet

Item No. 92.238.1060.3

Cable assembly GST18I3K1BS 25H 10GR01

geis® Extension cable female - male; length: 1m; type GST18I3;
3-pole; 250 V / 20 A; colour of coding: grey with grey strain-relief;
cable: H05Z1Z1-F 3G2,5, colour: black



Item No.	92.238.1060.3
EAN	4015573855991
Order Unit	50 Piece(s)

Certificates / Approvals



Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 2
Interlockable	Yes
Color of coding/ contact carrier	Pebble gray
Marking of poles	
Color of housing inclusive strain relief	Pebble gray

Model

Number of poles	3
Nominal cross section conductor	2.5 mm ²
Degree of protection (IP)	IP40
Cable type	H05Z1Z1-F
Cable colour	Black
Cable diameter	10.2 mm
Version of cable	Female - male

Type of cord set	Connecting cable
Version cable end 1	GST18i3 socket
Version cable end 2	GST18i3 plug


Material

Surface finish	Tin-plated
Halogen free	Yes
Continuous temperature of cable	70 °C
Insulation components continuous temperature	100 °C

Dimensions

Total length	1 m
--------------	-----

Technical drawing

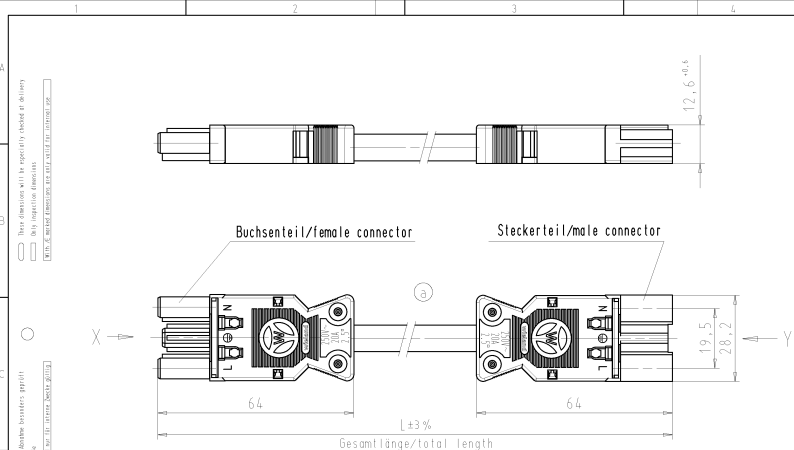

Kabeltype/cable-type H05Z1Z1-F3G2,5 halogenfrei/halogen-free
Farbe/colour: siehe Tabelle/see table

Gesamtlänge/total length: $L \pm 3\%$

.F	Farbe colour	Codierung Buchse female	Codierung Stecker male	Kabelfarbe cable colour
.1	schwarz black			schwarz black
.2	weiß white			weiß white
.3	grau grey			schwarz black
.5	rot red			schwarz black

Typ/type: GST18i3K1BS 25H..

SW = schwarz/black
WS = weiß/white
GR01 = grau/grey
RT03 = rot/red

Teile-Nr. part-no.	L	Beispiel (Farbe: schwarz) example (colour: black)	Typ type
92.238.XX60.F	XX in dm-Schritten	92.238.1060.1 = 10dm/L = 1000mm	GST18i3K1BS 25H 10SW
U2.238.XX60.F	XX in m-Schritten	U2.238.1260.1 = 12 m/L = 12000mm	GST18i3K1BS 25H X12SW
92.238.XX80.F	XX in dm-Schritten	92.238.1080.1 = 10dm/L = 1000mm	

80.F = spezielle Verpackung und Etikettierung nach A 1960.000
special packaging and label according to A 1960.000

Titelierung Size 100 1420/2012 Tolerance system Size 100 1420/2012 Tolerances: 2006 Tag/Date Name Zeichnung Nr./Drawing No. Index
 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations at form and parallel tolerances are limited by the size tolerances.)
 Freitoleranz nach General tolerance 200 - Zeichnung, keine numerischen Abänderungen 200 - drawing, no numerical modifications allowed 1. Forwarding: First Use: 92.238.0260.1 01K b

Weitere Daten siehe Katalog
further data see catalog

PRE-ASSEMBLED CABLE
KONFEKT-LEITUNG
Buchse/female - Stecker/male Crimpversion K1
250V AC 20A 2,5mm² halogen-free