



BEAM ATTACHMENT KIT

CATALOG NUMBER

SLBM12



FEATURES

- For installations where the cable cannot be looped around the steel beam
- Can support two catenary systems using each eye nut as an anchoring point
- Kit includes beam clamps and eye nuts
- Installs on top or bottom flange of I-beams-or bar joists


PRODUCT ATTRIBUTES

Article Number: 196852
Material: Steel
Finish: Electrogalvanized;Hot-Dip Galvanized
Flange Thickness: 10 – 20 mm
Rod Size: M12
Static Load 1: 400 N
Static Load 2: 700 N
Static Load 3: 800 N

ADDITIONAL PRODUCT DETAILS

Static load 1 represents a point load in the center of the catenary installation. Static load 2 represents a two or three point distributed load on the catenary installation. Static load 3 represents a four or more point distributed load on the catenary installation.

DIAGRAMS

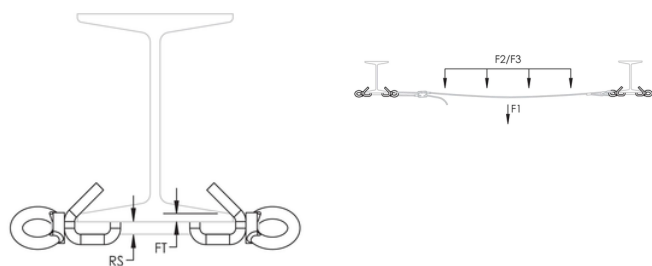

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221
Optie 1 - de Zorg van de Klant
Optie 2 - Technische Steun

Europa

Nederland:
+31 800-0200135
Frankrijk:
+33 800 901 793

Europa

Duitsland:
800 1890272
Andere Landen:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER