



ROOFTOP PYRAMID H-FRAME POST BASE, RUBBER

CATALOG NUMBER

PHBR



FEATURES

Foam or rubber bottom offers low abrasion interface for better roof membrane protection

Compatible with roof surfaces including single ply, bituminous, metal and spray foam

Provides superior load distribution, even with varying rooftop surfaces

Rubber rooftop interface ideal for solar panel array installations

Mounting hardware pre-installed in bases

Hot-dip galvanized and UV stabilized for long lasting performance

Accepts standard strut channels

PRODUCT ATTRIBUTES

Article Number: 360423

Material: Steel;Polypropylene;Polyethylene

Finish: Hot-Dip Galvanized

Temperature: -34 to 54 °C

Static Load Safety Factor: 3:1

Rooftop Interface: Rubber

Strut Type: A (41 x 41 mm)

Height: 118 mm

Length: 314 mm


Width: 314 mm

Surface Area: 0.10 m²

Unit Weight: 2 kg

Static Load: 3,335 N

DIAGRAMS

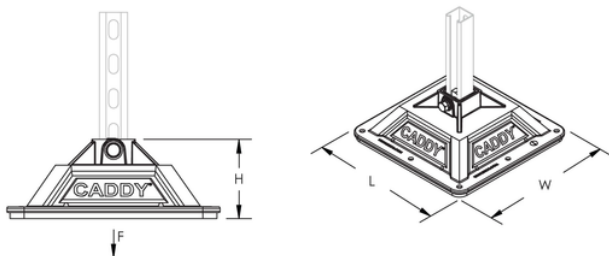

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Optie 1 - de Zorg van de Klant

Optie 2 - Technische Steun

Europa

Nederland:

+31 800-0200135

Frankrijk:

+33 800 901 793

Europa

Duitsland:

800 1890272

Andere Landen:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© nVent 2022. Alle nVent tekens en emblemen worden bezeten of door de nVent Diensten GmbH of zijn filialen vergunning gegeven. Alle andere handelsmerken zijn het bezit van hun respectieve eigenaars.

nVent reserves het recht specificaties zonder bericht te veranderen.