




UNIVERSAL STRUCTURAL ATTACHMENT, 9/16" HOLE

CATALOG NUMBER

CSBUNIV050EG



CERTIFICATIONS



FEATURES

Universal design allows one product to attach directly to concrete, wood, bar joist or I-beam adapters

Snap-off bolt head helps enable easy installation and inspection of seismic sway braces

Use for both lateral and longitudinal sway brace applications

Works with 1" through 2" brace pipes and 1/4" angle iron braces to reduce inventory

Center bolt does not require tightening

Meets NFPA®-13 requirements for seismic sway bracing

Meets CEN/TS 17551:2021 requirements for Seismic Sway Bracing

PRODUCT ATTRIBUTES

Article Number: 404407

Material: Cast Iron

Finish: Electrogalvanized

Hole Size: 14 mm

A: 133.40 mm


B: 101.6 mm

C: 41.4 mm

Brace Pipe Size: 1" – 2"

Brace NB/DN: 25 – 50 mm

DIAGRAMS

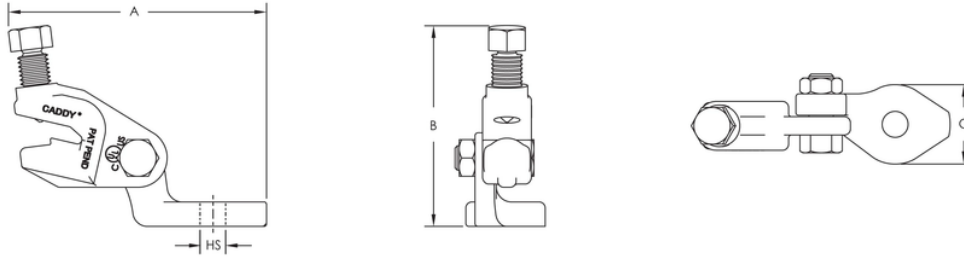

UL Loads

Part number	Brace Member	Rating
CSBUNIV050EG	25 mm - 50 mm EN10255H	6094 N
CSBUNIV075EG	25 mm - 50 mm EN10255H	8896 N

FM Loads

Brace Type	Service Pipe Size	Horizontal Capacity per Installation Angle from Vertical			
		30°- 44°	45°- 59°	60°- 74°	75°- 90°
Pipe	N/A	7,205 N	10,230 N	12,545 N	13,965 N

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Optie 1 - de Zorg van de Klant

Optie 2 - Technische Steun

Europa

Nederland:

+31 800-0200135

Frankrijk:

+33 800 901 793

Europa

Duitsland:

800 1890272

Andere Landen:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© nVent 2022. Alle nVent tekens en emblemen worden bezeten of door de nVent Diensten GmbH of zijn filialen vergunning gegeven. Alle andere handelsmerken zijn het bezit van hun respectieve eigenaars.

nVent reserves het recht specificaties zonder bericht te veranderen.