



MACROFIX NON-INSULATED M8/M10, 0.91"–1.14" OD, 3/4" PIPE

CATALOG NUMBER

MFN029EG



CERTIFICATIONS



FEATURES

Plastic washer prevents screws from falling out during installation

Combo head bolt works with slotted, hex, or Phillips drivers

Longer ears position the screw farther from the hanger, improving tool clearance when the screw is tightened

Combination nut can be attached to M8 or M10 threaded rod, simplifying material handling

Screw length has been optimized to accommodate an increased pipe range, reducing inventory-

PRODUCT ATTRIBUTES

Article Number: 586103

Material: Steel

Finish: Electrogalvanized

Outer Diameter: 23 – 29 mm

Pipe Size: 3/4"

NB/DN: 20

Rod Size: M8;M10

Width: 20 mm


Thickness: 1 mm

Screw Diameter: M6

Screw Length: 17 mm

Static Load: 1,000 N

DIAGRAMS

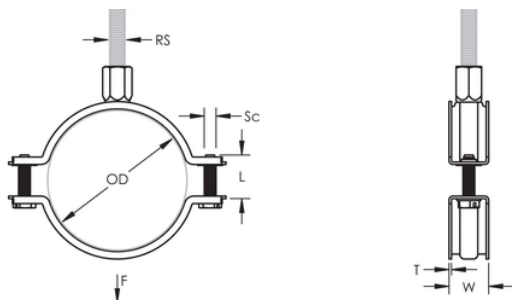

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Optie 1 - de Zorg van de Klant

Optie 2 - Technische Steun

Europa

Nederland:

+31 800-0200135

Frankrijk:

+33 800 901 793

Europa

Duitsland:

800 1890272

Andere Landen:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© nVent 2022. Alle nVent tekens en emblemen worden bezeten of door de nVent Diensten GmbH of zijn filialen vergunning gegeven. Alle andere handelsmerken zijn het bezit van hun respectieve eigenaars.

nVent reserves het recht specificaties zonder bericht te veranderen.