

EARLY STREAMER EMISSION TERMINAL, STAINLESS STEEL 304L (EN 1.4306), 25 MS TRIGGERED ADVANCE, ΔT

CATALOG NUMBER

SI25I



nVent ERICO INTERCEPTOR ESE i-Series generates controlled magnitude and frequency pulses at the tip of the terminal during high static fields prior to a lightning discharge. This enables the creation of an upward leader from the terminal that propagates toward the downward leader coming from the thunder cloud.

These early streamer emission air terminals (ESEAT) are in accordance with the 2011 edition of NFC 17-102. The design requirements, protection level calculations and protection radius are obtained from this standard. Due to the internal control circuit, the nVent ERICO INTERCEPTOR ESE i-Series enables the early launching of an upward leader compared to other passive components.

The nVent ERICO INTERCEPTOR ESE i-Series has been extensively tested at an independent high-voltage laboratory in accordance with the revised 2011 requirements of French NFC 17-102. The testing, as defined in the standard, was designed to simulate naturally occurring conditions and allow comparison of the performance between differing types of lightning protection systems.

CERTIFICATIONS



FEATURES

Designed and tested to NF C 17-102 and similar standards

Available in three models to suit specific site requirements

Suitable for use with a variety of downconductor systems including tape, stranded conductor and nVent ERICO Ericore conductor

PRODUCT ATTRIBUTES

Material: Stainless Steel 304L (EN 1.4306)

Complies With: NF C17-102:2011;NP 4426:2013;UNE 21186:2011

Triggered Advance, ΔT : 25 μ s

Temperature: 120 °C Max


Diameter: 28 mm

Height: 684.60 mm

Thread Size: MF25

Unit Weight: 1.530 kg

DIAGRAMS

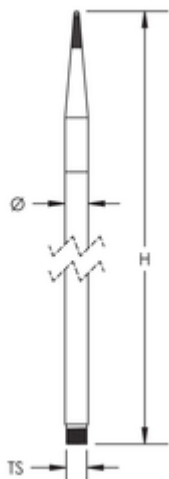

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Optie 1 - de Zorg van de Klant

Optie 2 - Technische Steun

Europa

Nederland:

+31 800-0200135

Frankrijk:

+33 800 901 793

Europa

Duitsland:

800 1890272

Andere Landen:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© nVent 2022. Alle nVent tekens en emblemen worden bezeten of door de nVent Diensten GmbH of zijn filialen vergunning gegeven. Alle andere handelsmerken zijn het bezit van hun respectieve eigenaars.

nVent reserves het recht specificaties zonder bericht te veranderen.