

FOUR POLE DISTRIB. BLOCK WITH THREADED BARS, FLAT, 400 A

CATALOG NUMBER

TRC-400A



CERTIFICATIONS



FEATURES

Transparent protection cover

Bolts included for output connections

Easy accessibility for wiring

Ready to use out of the box, saving installation time and labor

RoHS compliant

PRODUCT ATTRIBUTES

Article Number: 563180

Material: Copper;Glass Fibre Reinforced Polyamide;Plexiglass

Max Working Voltage, IEC (Ui): 1,000 V

Peak Short Circuit Current (Ipk): 118 kA

Short Term Withstand Current (Icw) 1s: 28 kA

Line Side Number of Connections: 1

Load Side Number of Connections: 10

Thread Size 1: M6

Thread Size 2: M10

Depth: 50 mm

Height: 338 – 390 mm

Width: 260 mm

A: 290 mm

Unit Weight: 2.650 kg

Flammability Rating: UL® 94V-0


Complies With: IEC® 60439.1; IEC® 61439.1; IEC® 60695-2-11 (Glow Wire Test 960 °C)

ADDITIONAL PRODUCT DETAILS

Thread Size 2 represents input plug.

Line side and load side number of connections are per pole.

DIAGRAMS

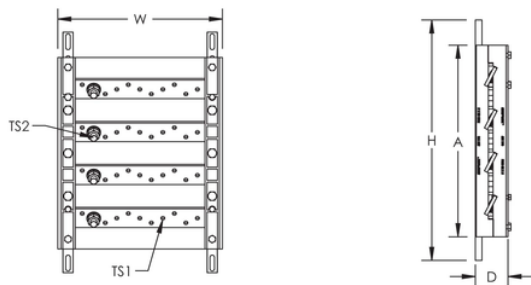

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Optie 1 - de Zorg van de Klant

Optie 2 - Technische Steun

Europa

Nederland:

+31 800-0200135

Frankrijk:

+33 800 901 793

Europa

Duitsland:

800 1890272

Andere Landen:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© nVent 2022. Alle nVent tekens en emblemen worden bezeten of door de nVent Diensten GmbH of zijn filialen vergunning gegeven. Alle andere handelsmerken zijn het bezit van hun respectieve eigenaars.

nVent reserves het recht specificaties zonder bericht te veranderen.