


CABS BUSBAR SUPPORT KIT, 1-4 BUSBARS PER PHASE, 30-125 MM BUSBAR WIDTH, 5 MM BUSBAR THICKNESS, 550 MM

CATALOG NUMBER

CABS4-5TN-600



CERTIFICATIONS



FEATURES

For all busbar types

Improve bending resistance by interlocking or stacking two profiles

Quick and easy to install

Halogen free insulators

RoHS compliant

PRODUCT ATTRIBUTES

Article Number: 549260

Material: Aluminum;Glass Fibre Reinforced Polyamide;Steel

Finish: Elektrolytisch gegalvaniseerd

Typical Application Current Rating: 400 – 4,500 A

Max Working Voltage, IEC (Ui): 1,000 VAC;1,500 VDC

Working Temperature: -40 to 130 °C

Complies With: IEC® 60439.1;IEC® 61439.1;IEC® 60695-2-11 (Glow Wire Test 960 °C)

Flammability Rating: UL® 94V-0

Busbars per Phase: 1 – 4

Busbar Width: 30 – 125 mm

Busbar Thickness: 5 mm

Depth: 39 mm

Width: 550 mm


A: 500 mm

B: 75 – 125 mm

C: 525 mm

Unit Weight: 0.840 kg

DIAGRAMS

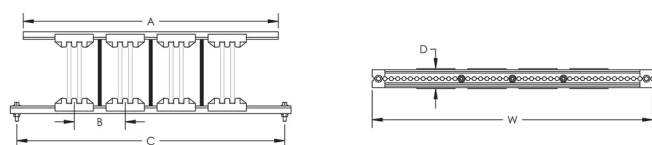

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER