

QCC NVENT ERIFLEX FLEXIBAR CLAMP, 40–63 MM

CATALOG NUMBER

QCC40-63



CERTIFICATIONS



FEATURES

Connects nVent ERIFLEX Flexibar to punched busbar

Allows for excellent electrical contact

Compact, ruimtebesparend ontwerp

Installs quickly and easily

Ideal for on site modifications

PRODUCT ATTRIBUTES

Article Number: 561220

Material: Staal

Finish: Elektrolytisch gegalvaniseerd

Conductor Width: 40 – 63 mm

Depth: 13 mm

Height: 35 mm

Width: 95 mm


Thickness: 5 mm

A: 75 mm
B: 10.5 mm
C: 11 mm
Unit Weight: 0.158 kg

ADDITIONAL PRODUCT DETAILS

Use one clamp when nVent ERIFLEX Flexibar thickness is less than 5 mm (0.2") and two clamps when nVent ERIFLEX Flexibar thickness is greater than 5 mm (0.2").

DIAGRAMS

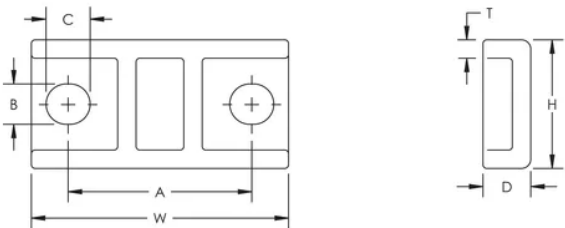

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika +1.800.753.9221 Option 1 – Customer Care Option 2 – Technical Support	Europa Netherlands: +31 800-0200135 France: +33 800 901 793	Europa Germany: 800 1890272 Other Countries: +31 13 5835404	APAC Shanghai: + 86 21 2412 1618/19 Sydney: +61 2 9751 8500
---	--	--	--