


VIERPOLIGE VERDEELBLOK MET GETAPTE RAIL, 400 A

CATALOG NUMBER

TR-400A



CERTIFICATIONS



FEATURES

- Easily fixes onto DIN rail or mounts with screws
- Bolts included for output connections
- Transparent protection cover
- Easy accessibility for wiring
- Na uitpakken direct klaar voor gebruik, installatietijd en arbeid besparend
- RoHS compliant

PRODUCT ATTRIBUTES

- Article Number: 562010
- Material: Copper;Glass Fibre Reinforced Polyamide;Plexiglass
- Max Working Voltage, IEC (Ui): 1,000 V
- Peak Short Circuit Current (I_{pk}): 34 kA
- Short Term Withstand Current (I_{cw}) 1s: 28 kA
- Line Side Number of Connections: 1
- Load Side Number of Connections: 8

Hole Size: 10 mm

Thread Size: M6

Depth: 140 mm

Height: 240 mm

Width: 300 mm

Unit Weight: 2.830 kg


Flammability Rating: UL® 94V-0

Complies With: IEC® 60439.1; IEC® 61439.1; IEC® 60695-2-11 (Glow Wire Test 960 °C)

ADDITIONAL PRODUCT DETAILS

Line side and load side number of connections are per pole.

DIAGRAMS

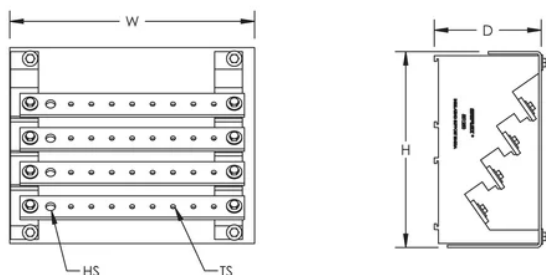

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER