

FLEXBUS HCBC PLAAT MET PE AANSLUITING, 10,5 MM GAT 1, 14,5 MM GAT 2

CATALOG NUMBER

FLEXPLATE50PE



CERTIFICATIONS



FEATURES

Rigid tinned copper part provides strong electrical contact to maintain braid expansion during compression

HCBC Plate allows Flexbus Conductor insulation to overlap the connection palm

HCBC Plate with PE connection allows conductor to be added to interconnect neutral and ground/earth

Vertind koper maakt het mogelijk om koperen of aluminium geleiders aan te sluiten

Installs quickly and easily

RoHS compliant

PRODUCT ATTRIBUTES

Article Number: 508182

Material: Koper

Finish: Vertind

A: 50 mm

B: 100 mm

C: 45 mm

D: 32 mm

E: 70 mm

Hole Size 1: 10.5 mm

Hole Size 2: 14.5 mm

Thickness: 5 mm


Conductor Size: 220 mm²;360 mm²;545 mm²;640 mm²

Unit Weight: 0.490 kg

ADDITIONAL PRODUCT DETAILS

It is mandatory to use the HCBC Clamp associated with the HCBC Plate for proper Flexbus Conductor connection.

DIAGRAMS

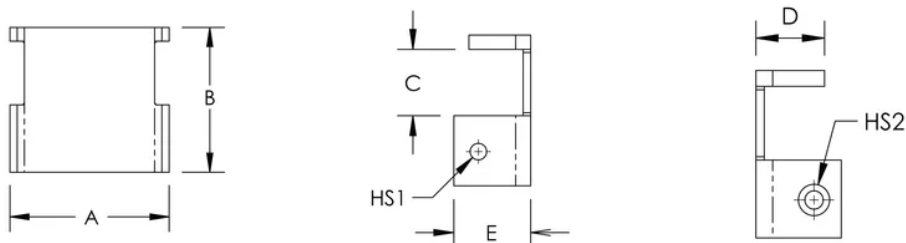

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER