


HCBC HIGH CURRENT BUSBAR CLAMP, 100 MM

CATALOG NUMBER

HCBC100



CERTIFICATIONS



FEATURES

Connects copper busbar to copper busbar, nVent ERIFLEX Flexibar or power shunt

Made with non-magnetic materials for high current connections between nVent ERIFLEX Flexibar and rigid busbars such as transformer terminals

Rigid design assures even contact pressure

Installs quickly and easily

Ideal for on site modifications

RoHS compliant

PRODUCT ATTRIBUTES

Article Number: 553110

Material: Stainless Steel 304 (EN 1.4301)

Clamping Capacity: 40 mm

Conductor Width: 100 mm

Depth: 20 mm


Height: 43 mm

Width: 160 mm
Thickness: 4 mm
Torque: 100 N-m
Unit Weight: 0.920 kg

ADDITIONAL PRODUCT DETAILS

Use two clamps for optimal contact pressure.

DIAGRAMS

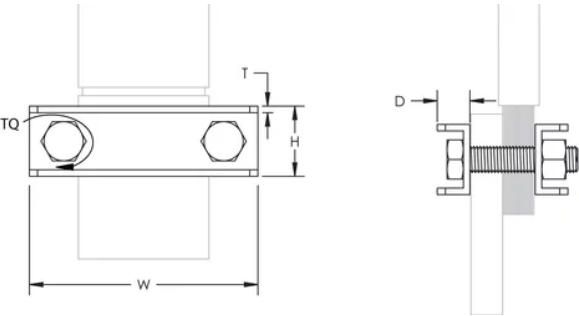

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika +1.800.753.9221 Option 1 – Customer Care Option 2 – Technical Support	Europa Netherlands: +31 800-0200135 France: +33 800 901 793	Europa Germany: 800 1890272 Other Countries: +31 13 5835404	APAC Shanghai: + 86 21 2412 1618/19 Sydney: +61 2 9751 8500
---	--	--	--