

CATALOG NUMBER

ISOTP50F8M8



CERTIFICATIONS



FEATURES

Halogeenvrij

High resistance to leakage current

Great stability of electrical and mechanical parameters

Fiberglass reinforced

UL® Recognized in E125470 and evaluated for dielectric withstand rating of 1,500 VAC/DC

RoHS compliant

PRODUCT ATTRIBUTES

Article Number: 542070

Material: Steel;Glass Fibre Reinforced Polyamide

Finish: Elektrolytisch gegalvaniseerd

Working Temperature: -40 to 130 °C

Insulation Voltage: 1,000 VAC;1,500 VDC

Flammability Rating: UL® 94V-0

Complies With: IEC® 60695-2-11 (Glow Wire Test 960 °C)

Height: 50 mm

Hex Width: 50 mm

Depth: 57 mm

Diameter: 41 mm

Thread Size 1: M8

Thread Length: 17 mm

Thread Size 2: M8


Thread Depth: 15 mm

Static Load 1: 20,000 N

Static Load 2: 10,000 N

Unit Weight: 0.150 kg

DIAGRAMS

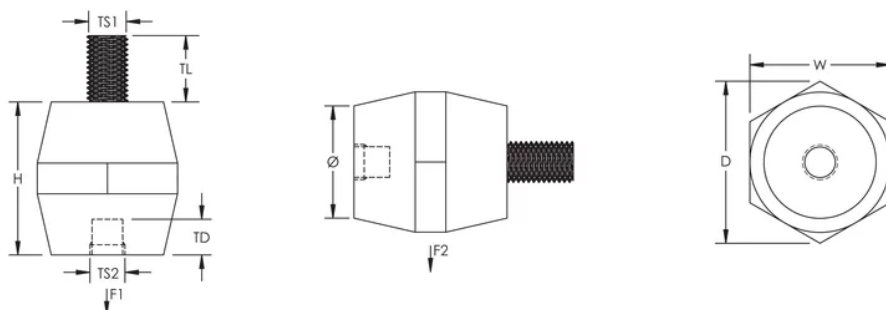

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER