

S7-PI
8-pin C7 Relay socket | Push-In



Table with 2 columns: General data, Specifications. Rows include Rated load (10 A for 1 pole / 250 V), Dielectric strength (2.5 kV rms / 1 min), Cross-section of connecting wire (2 x 0.34 mm² / AWG 22 ... 2 x 2.5 mm² / AWG 14), Mounting (TH35 (EN 60715)), Ambient temperature storage (no ice) (-40 ... 80 °C), Ambient temperature operation (-40 ... 60 °C), Weight (46 g), Housing material (PA).

Table with 2 columns: Included Accessories, Details. Row: Retaining clip, plastic | S7-CPI

Table with 2 columns: Optional Accessories, Details. Rows include Retaining clip, plastic (S7-CPI (BAG 10 PCS)), Bridge bar A2 for Sx-PI / Sx-PIR (Sxx-BBPI (BAG 20 PCS)), 2-way bridge bar for main circuit terminals (Sxx-BBPI2 (BAG 20 PCS)), 4-way bridge bar for main circuit terminals (Sxx-BBPI4 (BAG 20 PCS)), Multi-operation tool kit for Push-in sockets (OT-PI kit), Label strip for push-in sockets (BS11-PI (50m tape)).

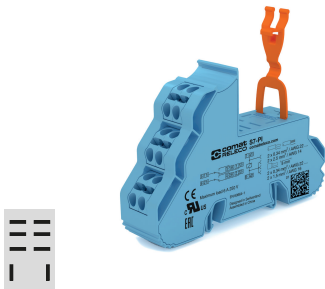


fig. 1. Wiring diagram


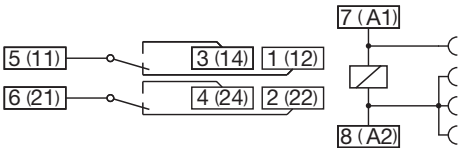


fig. 2. Dimension (mm)

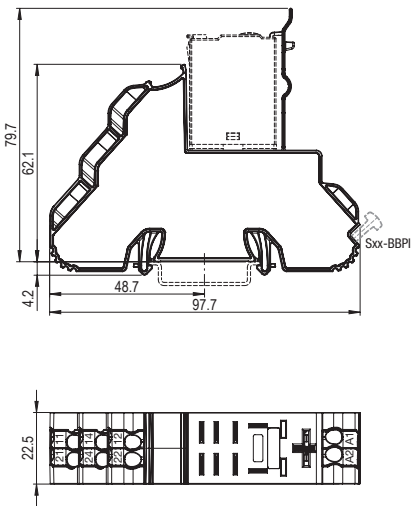

Technical approvals, conformities

Standards EN 60664-1

Approvals CE, UL, ENEC