

S9-PI
14-pin C9 Relay socket | Push-In



General data table with 2 columns: Property and Value. Rows include Rated load (6 A / 250 V), Dielectric strength, Cross-section of connecting wire, Mounting, Ambient temperature storage, Ambient temperature operation, Weight, and Housing material.

Included Accessories table with 2 columns: Item and Quantity. Row: Retaining clip, plastic (S7-CPI).

Optional Accessories table with 2 columns: Item and Quantity. Rows include Retaining clip, plastic; Bridge A2 for Sx-PI / Sx-PIR; 2-way bridge for main circuit terminals; 4-way bridge for main circuit terminals; Multi-operation tool kit for Push-in sockets; and Label strip for push-in sockets.



fig. 1. Wiring diagram


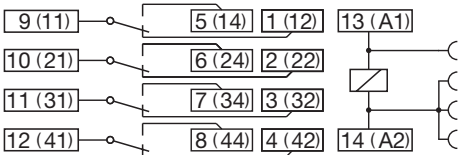


fig. 2. Dimension (mm)

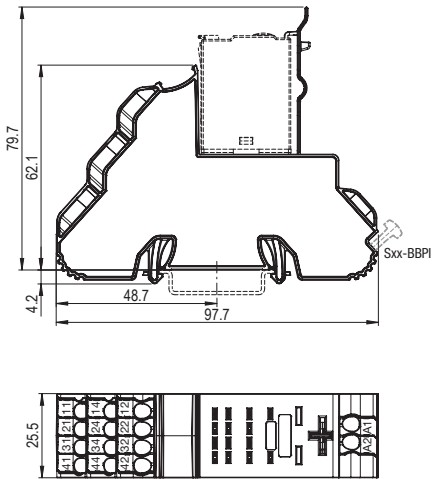

Technical approvals, conformities

Standards EN 60664-1
Approvals CE, c, RU, us, EAC