

SPACING TABLE 1 HOUR EMERGENCY DURATION

SERIE 200 POLAREM

Ceiling Corridor (CC)




Luminous flux: 570 lm

Emergency lighting factor: 0.64

Emergency luminous flux: 365 lm



HBI Bisscheroux B.V. 2L05--CC--- Polarem CC / LVK (polair)

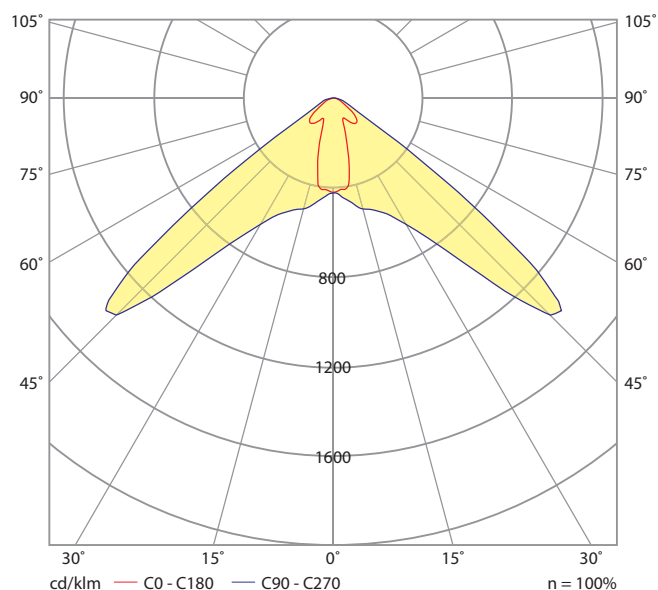

1 lux - 1 hour duration

Mounting height (meters)	Diagram 1	Diagram 2	Diagram 3	Diagram 4	Diagram 5
2.50	4.3	9.9	9.1	8.3	3.6
3.00	4.9	11.0	10.1	9.2	3.9
3.50	5.5	12.1	11.1	10.1	4.2
4.00	6.1	13.3	12.1	10.9	4.4
4.50	6.7	14.5	13.0	11.4	4.4
5.00	7.3	15.7	13.7	12.0	4.0
6.00	8.4	18.2	12.9	10.9	2.4
7.00	9.4	20.5	13.7	9.8	2.4
8.00	10.4	22.7	14.8	6.6	2.5
9.00	11.3	24.9	15.8	6.7	2.5
10.00	12.2	26.9	16.9	6.9	2.4
11.00	12.9	28.8	17.9	7.0	2.3
12.00	13.4	30.7	18.8	7.0	1.7