

SPACING TABLE 1 HOUR EMERGENCY DURATION SERIE 770 SEPTAGEM




Luminous flux: 489 lm

Emergency lighting factor: 1.00

Emergency luminous flux: 489 lm



HBI Bisscheroux B.V. 7SL0404- 770 Septagem / LVK (polair)

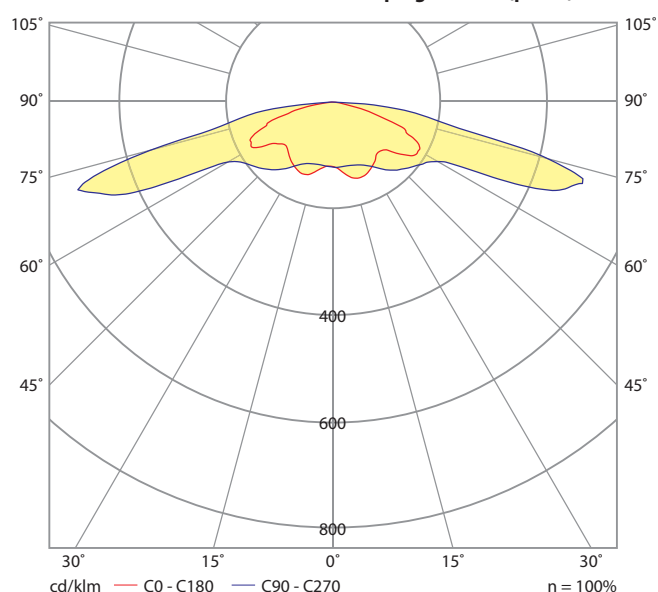

1 lux - 1 hour duration

Mounting height (meters)	Corridor	Corridor	Corridor	Open area	Open area
2.50	8.1	19.0	16.0	13.2	5.4
3.00	8.3	21.0	17.4	14.2	5.7
3.50	6.5	22.5	18.7	15.2	5.9
4.00	6.3	21.9	18.1	15.8	5.8
4.50	6.1	22.0	17.4	16.1	4.9
5.00	5.9	21.3	17.3	16.0	4.6
6.00	5.1	17.5	16.0	13.7	4.3
7.00	3.0	16.8	14.8	12.9	3.7