


Category (ETIM):	Light strip
Type:	ILG LED
Order number:	16171024100
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver
Mains voltage:	230V / 50Hz
System performance (W):	19
Luminaire luminous flux (lm):	2000
lm/W:	104
Energy efficiency class:	A+
Impact resistance (IK rating):	IK06
Certifications:	IP 20, protection class I, Glow-wire flammability test 850°C, F, MM, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	0.95
Dimensions LxWxH/DxH (mm):	580 x 56 x 66
Cable entry KE X/Y (mm):	83 / 0
mounting method:	Surface single mounting, Surface light run mounting, Suspended single mounting
EAN-number:	4020863322664
Commodity code:	94051098

ilia-ILG/0600 LED 2000lm 840 • vw • ED • 16171024100




Lighting technology
Diffuser, opal-direct diffuse distribution
ILG/0600 LED 2000 lm 840

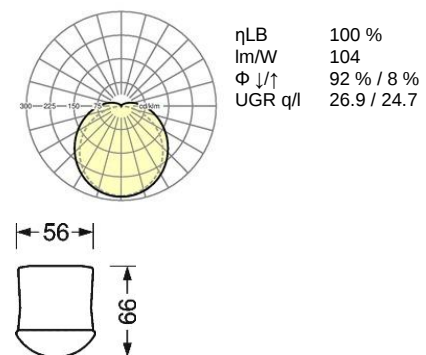

Light strip; Housing made of torsion-resistant profiled sheet steel; with captive rotary catches, the profiling of the upper part forms a cable duct for sheathed cables up to 5 x 1.5 mm² cross section; Housing colour traffic white RAL 9016; open distribution; Electrical connection via 3-pole connection terminal with plug-in contacts.

Dimensions LxWxH/DxH (mm): 580 x 56 x 66
Cable entry KE X/Y (mm): 83 / 0
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 2000
lm/W: 104
Operating device: Electronic driver
System performance (W): 19
Energy efficiency class: A+
Impact resistance (IK rating): IK06
Certifications: IP 20, protection class I, Glow-wire flammability test 850°C, F, MM, Indoor, CE

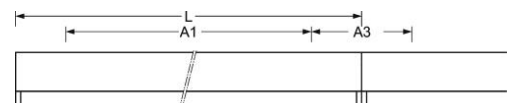

Regiolux GmbH
Type: ilia-ILG/0600 LED 2000 840 ET vw
Article number: 16171024100
Product deep link: <http://www.regiolux.de/en/article/16171024100>
5 year guarantee after registration on website.