


Category (ETIM):	Mounted luminaire
Type:	UAX LED
Order number:	65070506660
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	29
Luminaire luminous flux (lm):	4000
lm/W:	135
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<1000, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	4.5
Dimensions LxWxDxH (mm):	600 x 600 x 63
Cable entry KE X/Y (mm):	0 / 15
mounting method:	Surface single mounting
EAN-number:	4020863320417
Commodity code:	94051098


UAX LED 4000lm 840 • vw • DALI • 65070506660



Lighting technology
Parabolic louvre, silky matt-direct distribution
UAX LED 4000 lm 840



ηLB	100 %
lm/W	135
Φ ↓/↑	100 % / 0 %
UGR q/l	11.4 / 16.6
BAP	65° < 1000cd/m²

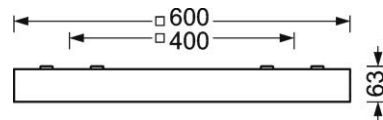

Mounted luminaire; Sheet steel housing with welded end faces, rectangular cross section; Housing colour traffic white RAL 9016; Direct light distribution using reflectivity-enhanced silk matt, anodised aluminium parabolic louvre, for workstations, 65° < 1000 cd/m² omnidirectional glare suppression according to current DIN EN 12464-1 standard, self-engaging, can be folded down on both sides; Electrical connection via 5-pole connection terminal with plug-in contacts.

Dimensions LxWxDxH (mm): 600 x 600 x 63
Cable entry KE X/Y (mm): 0 / 15
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80
Luminaire luminous flux (lm): 4000
lm/W: 135
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 29
Energy efficiency class: A+
Certifications: IP 20, protection class I, BAP 65°<1000, F, Indoor, CE

Regiolux GmbH
Type: UAX LED 4000 840 DALI vw
Article number: 65070506660
Product deep link: <http://www.regiolux.de/en/article/65070506660>
5 year guarantee after registration on website.