


|                               |                                                                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Category (ETIM):              | Mounted luminaire                                                                                                                      |
| Type:                         | procube-CUAX LED                                                                                                                       |
| Order number:                 | 60402024160                                                                                                                            |
| Configuration:                | Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10                 |
| Operating device:             | Electronic driver (1 pcs.)                                                                                                             |
| Mains voltage:                | 230V / 50Hz                                                                                                                            |
| System performance (W):       | 69                                                                                                                                     |
| Luminaire luminous flux (lm): | 6500                                                                                                                                   |
| lm/W:                         | 94                                                                                                                                     |
| Energy efficiency class:      | A+                                                                                                                                     |
| Certifications:               | IP 20, protection class I, BAP 65°<1000, F, Indoor, CE                                                                                 |
| Colour of the housing:        | traffic white RAL 9016                                                                                                                 |
| Weight (net) (kg):            | 3.3                                                                                                                                    |
| Dimensions LxWxH/DxH (mm):    | 1179 x 161 x 54                                                                                                                        |
| Cable entry KE X/Y (mm):      | 0 / 56                                                                                                                                 |
| mounting method:              | Surface single mounting, Surface light run mounting, Mounting rail mounting, Suspended single mounting, Suspended / light run mounting |
| EAN-number:                   | 4020863309634                                                                                                                          |
| Commodity code:               | 94051098                                                                                                                               |

## procube-CUAX/1200-2 LED 6500lm 840 • vw • ED • 60402024160



**Lighting technology**  
Micro-parabolic louvre, silky matt-direct distribution  
CUAX/1200-2 LED 6500 lm 840

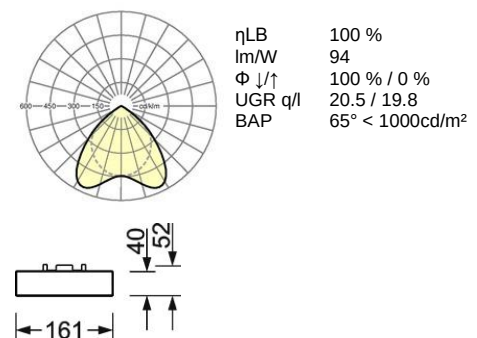

Mounted luminaire; Sheet steel housing, compact rectangular cross section, installation height 40 mm; prepared for fixing of end faces or luminaire connectors made of steel. Housing colour traffic white RAL 9016; Direct light distribution using reflectivity-enhanced aluminium parabolic louvre, silk matt with low installation height cross blades, for workstations, °65 < 1000 cd/m² omnidirectional glare suppression according to the current DIN EN 12464-1 standard, self-engaging, louvre is optically seamless for light run mounting; Electrical connection via 3-pole connection terminal with plug-in contacts. Required accessories: please order end faces, connectors and through-wiring separately according to luminaire arrangements. Mounting on mounting rail possible. Required accessories are available on request.

Dimensions LxWxH/DxH (mm): 1179 x 161 x 54  
Cable entry KE X/Y (mm): 0 / 56  
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10  
Luminaire luminous flux (lm): 6500  
lm/W: 94  
Operating device: Electronic driver (1 pcs.)  
System performance (W): 69  
Energy efficiency class: A+  
Certifications: IP 20, protection class I, BAP 65°<1000, F, Indoor, CE

Regiolux GmbH  
Type: procube-CUAX/1200-2 LED 6500 840 ET vw  
Article number: 60402024160  
Product deep link: <http://www.regiolux.de/en/article/60402024160>  
5 year guarantee after registration on website.

