



|                               |                                                                                                                                         |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Category (ETIM):              | Recessed luminaire                                                                                                                      |
| Type:                         | RSEX LED                                                                                                                                |
| Order number:                 | 71010306660                                                                                                                             |
| Configuration:                | Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10                  |
| Operating device:             | Electronic driver DALI (1 pcs.)                                                                                                         |
| Mains voltage:                | 230V / 50Hz                                                                                                                             |
| System performance (W):       | 28                                                                                                                                      |
| Luminaire luminous flux (lm): | 3200                                                                                                                                    |
| lm/W:                         | 115                                                                                                                                     |
| Energy efficiency class:      | A+                                                                                                                                      |
| Certifications:               | IP 20, protection class I, BAP 65°<1000, F, F-roof, Indoor, CE                                                                          |
| Colour of the housing:        | traffic white RAL 9016                                                                                                                  |
| Weight (net) (kg):            | 5                                                                                                                                       |
| Dimensions LxWxD (mm):        | 1247 x 310 x 58                                                                                                                         |
| Depth (mm):                   | 51                                                                                                                                      |
| Ceiling system:               | Ceilings with visible T-rails [s-TS] (312.5x1250mm), Concealed symmetrical rail construction [VS] (312.5x1250mm), cut-out ceilings [AD] |
| Necessary depth min. (mm):    | 120(AD); 170(s-TS); 120(VS)                                                                                                             |
| Ceiling cut-out LxW/D (mm):   | 1180 x 275                                                                                                                              |
| mounting method:              | Ceiling recessing single mounting                                                                                                       |
| EAN-number:                   | 4020863313488                                                                                                                           |
| Commodity code:               | 94051098                                                                                                                                |

## RSEX/312 -1250 LED 3200lm 840 • vw • DALI • 71010306660

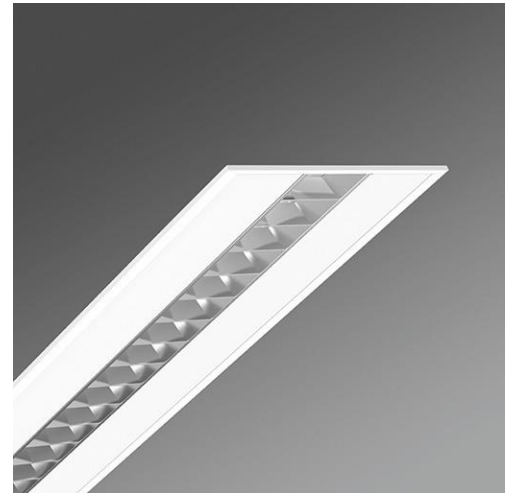

**Lighting technology**  
Parabolic louvre, silky matt-direct distribution  
RSEX/312 -1250 LED 3200 lm 840

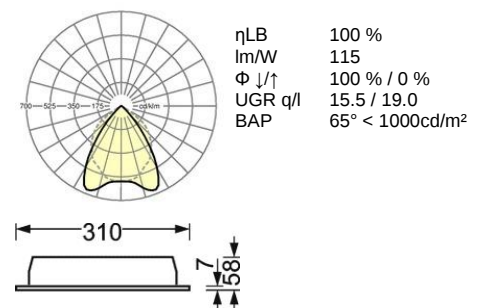

Recessed luminaire; Sheet steel housing with uniformly wide circumferential edge and 7 mm raised edges for ceilings with visible T-rails, concealed symmetrical rail constructions and recessed ceilings; Housing colour traffic white RAL 9016; Direct light distribution using reflectivity-enhanced silk matt, anodised aluminium parabolic louvre, for workstations, 65° < 1000 cd/m² omnidirectional glare suppression according to current DIN EN 12464-1 standard, self-engaging, can be folded down on both sides; Electrical connection via 5-pole connection terminal with plug-in contacts. UBB T5 LED universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT CLIPS securing clips for ceilings with visible T rails: please order separately.

Dimensions LxWxD (mm): 1247 x 310 x 58  
Ceiling system: Ceilings with visible T-rails [s-TS] (312.5x1250mm), Concealed symmetrical rail construction [VS] (312.5x1250mm), cut-out ceilings [AD]  
Necessary depth min. (mm): 120(AD); 170(s-TS); 120(VS)  
Ceiling cut-out LxW/D (mm): 1180 x 275  
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10  
Luminaire luminous flux (lm): 3200  
lm/W: 115  
Operating device: Electronic driver DALI (1 pcs.)  
System performance (W): 28  
Energy efficiency class: A+  
Certifications: IP 20, protection class I, BAP 65°<1000, F, F-roof, Indoor, CE

Regiolux GmbH  
Type: RSEX/312 -1250 LED 3200 840 DALI vw  
Article number: 71010306660  
Product deep link: <http://www.regiolux.de/en/article/71010306660>  
5 year guarantee after registration on website.

