

# Datasheet


# REGIOLUX

|                               |                                                                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Category (ETIM):              | Mounted luminaire                                                                                                                      |
| Type:                         | hokal-HLAG LED                                                                                                                         |
| Order number:                 | 60501024180                                                                                                                            |
| Configuration:                | Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10                 |
| Operating device:             | Electronic driver (1 pcs.)                                                                                                             |
| Mains voltage:                | 230V / 50Hz                                                                                                                            |
| System performance (W):       | 28                                                                                                                                     |
| Luminaire luminous flux (lm): | 2500                                                                                                                                   |
| lm/W:                         | 87                                                                                                                                     |
| Energy efficiency class:      | A+                                                                                                                                     |
| Certifications:               | IP 20, protection class I, F, Indoor, CE                                                                                               |
| Colour of the housing:        | traffic white RAL 9016                                                                                                                 |
| Weight (net) (kg):            | 3.1                                                                                                                                    |
| Dimensions LxWxH/DxH (mm):    | 1176 x 85 x 75                                                                                                                         |
| Cable entry KE X/Y (mm):      | 0 / 0                                                                                                                                  |
| mounting method:              | Surface single mounting, Surface light run mounting, Mounting rail mounting, Suspended single mounting, Suspended / light run mounting |
| EAN-number:                   | 4020863318414                                                                                                                          |
| Commodity code:               | 94051098                                                                                                                               |

**hokal-HLAG/1200 LED 2500lm 840 • vw • ED • 60501024180**



**Lighting technology**  
Diffuser, satined-direct distribution  
HLAG/1200 LED 2500 lm 840

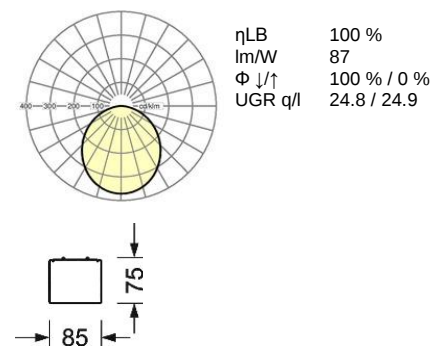

Mounted luminaire; Sheet steel housing with square design; prepared for fixing end faces or luminaire connectors made of steel; Housing colour traffic white RAL 9016; Direct light distribution; glare suppression using diffuse distribution frosted polycarbonate profile; diffuser is optically seamless for light run mounting; Electrical connection via 3-pole connection terminal with plug-in contacts. Required accessories: Please order end faces, connectors and through-wiring separately according to luminaire arrangements. Mounting on mounting rail possible. Required accessories are available on request.

Dimensions LxWxH/DxH (mm): 1176 x 85 x 75  
Cable entry KE X/Y (mm): 0 / 0  
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10  
Luminaire luminous flux (lm): 2500  
lm/W: 87  
Operating device: Electronic driver (1 pcs.)  
System performance (W): 28  
Energy efficiency class: A+  
Certifications: IP 20, protection class I, F, Indoor, CE

Regiolux GmbH  
Type: hokal-HLAG/1200 LED 2500 840 ET vw  
Article number: 60501024180  
Product deep link: <http://www.regiolux.de/en/article/60501024180>  
5 year guarantee after registration on website.

