


Datasheet

REGIOLUX


| | |
|-------------------------------|--|
| Category (ETIM): | Device mounts |
| Type: | Device mount IP20-SDGOTB LED |
| Order number: | 18530106600 |
| Configuration: | Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10 |
| Operating device: | Electronic driver DALI (1 pcs.) |
| Mains voltage: | 230V / 50Hz |
| System performance (W): | 26 |
| Luminaire luminous flux (lm): | 4000 |
| lm/W: | 156 |
| Energy efficiency class: | A++ |
| Ambient temperatures: | 10°C / 45°C |
| Certifications: | IP 20, protection class I, BAP 65°<3000, F, DIN10500/Food, Indoor, CE |
| Colour of the housing: | traffic white RAL 9016 |
| Weight (net) (kg): | 1.9 |
| Dimensions LxWxH/DxH (mm): | 1531 x 55 x 37 |
| EAN-number: | 4020863325603 |
| Commodity code: | 94051098 |

**SDGOTB LED 4000lm 840 • vw • DALI •
18530106600**

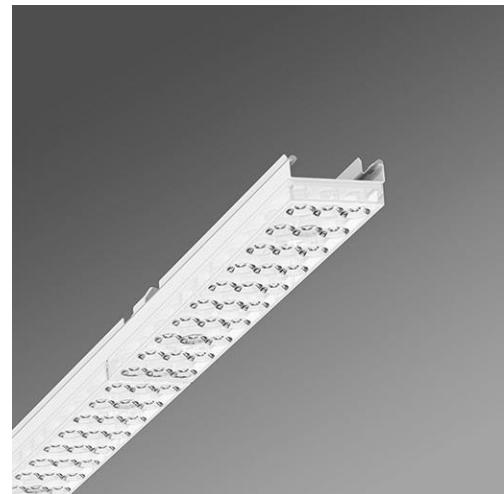

Lighting technology

Individual.Lens.Optic-direct narrow/wide distribution
SDGOTB LED 4000 lm 840

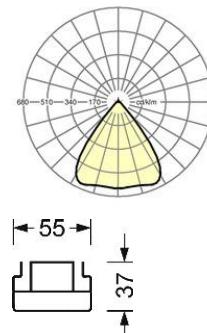

| | |
|---------|-----------------|
| ηLB | 100 % |
| lm/W | 156 |
| Φ J↑ | 98 % / 2 % |
| UGR q/l | 16.6 / 16.9 |
| BAP | 65° < 3000cd/m² |

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Direct narrow/wide-beam light distribution using individual. lens. optic made of PMMA plastic. Continuous optics. Uniform LED spacing, even across circuit boards. 3-row LED arrangement. Light direction components are easy to maintain due to smooth surface which is easily cleaned. Heat-resistant cables including fixed 5-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4000
lm/W: 156
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 26
Energy efficiency class: A++
Conditions: Suitable for use in ambient temperatures of 10°C to 45°C
Certifications: IP 20, protection class I, BAP 65°<3000, F, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGOTB LED 4000 840 DALI vw
Article number: 18530106600
Product deep link: <http://www.regiolux.de/de/article/18530106600>
5 year guarantee after registration on website.