


Category (ETIM):	Suspended luminaire
Type:	peanut-corridor-HGI LED
Order number:	52620046680
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	35
Luminaire luminous flux (lm):	3600
lm/W:	104
Energy efficiency class:	A+
Impact resistance (IK rating):	IK08
Certifications:	IP 55, protection class I, F, D, DIN10500/Food, Indoor, CE
Colour of the housing:	translucent
Weight (net) (kg):	3.08
Dimensions LxWxDxH (mm):	1260 x 158 x 76
mounting method:	Suspended single mounting
EAN-number:	4020863287918
Commodity code:	94051040


corridor-HGI/1200 LED 3600lm 840 • tz • DALI • 52620046680



Lighting technology
Diffuser, matt-direct/indirect distribution
corridor-HGI/1200 LED 3600 lm 840




ηLB	100 %
lm/W	104
Φ ↓/↑	90 % / 10 %
UGR q/l	19.9 / 19.2



Suspended luminaire; Polycarbonate housing, injection moulded, translucent with patented labyrinth profile, without additional sealing (resistant to ageing), two outer V2A fastening clips, moveable for drill hole compensation, clip-free mounting of diffuser, impact resistance > 6 Nm; easy-to-clean housing surface; Housing colour translucent; Direct / indirect light distribution, glare suppression due to frosted coating in optic emitting diffuse light; Electrical connection via 5-pole connection terminal with plug-in contacts.

Dimensions LxWxDxH (mm): 1260 x 158 x 76
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 3600
lm/W: 104
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 35
Energy efficiency class: A+
Impact resistance (IK rating): IK08
Certifications: IP 55, protection class I, F, D, DIN10500/Food, Indoor, CE

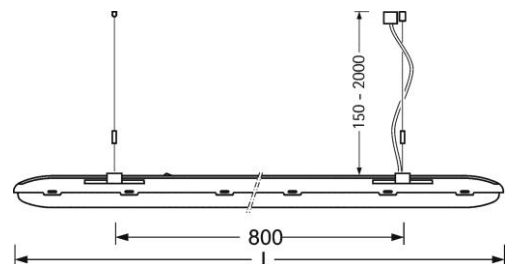

Regiolux GmbH
Type: corridor-HGI/1200 LED 3600 840 DALI tz
Article number: 52620046680
Product deep link: <http://www.regiolux.de/en/article/52620046680>
5 year guarantee after registration on website.