


|                                                     |                                                                                                                     |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Category (ETIM):                                    | diffuser luminaire                                                                                                  |
| Type:                                               | WBLR LED                                                                                                            |
| Order number:                                       | 25330124110                                                                                                         |
| Configuration:                                      | Lamps integrated: LED, Light colour 830/warm white (3000K), Colour rendering Ra=80; LED service life 50000h L80/B10 |
| Operating device:                                   | Electronic driver emergency light 3 hours (1 pcs.)                                                                  |
| Mains voltage:                                      | 230V / 50Hz                                                                                                         |
| System performance (W):                             | 22                                                                                                                  |
| Ballast lumen factor BLF (emergency lighting mode): | 5.8                                                                                                                 |
| Luminaire luminous flux (lm):                       | 1900                                                                                                                |
| lm/W:                                               | 88                                                                                                                  |
| Impact resistance (IK rating):                      | IK02 TA+25°C                                                                                                        |
| Certifications:                                     | IP 40, protection class I, BAP 65°<3000, Glow-wire flammability test 650°C, Impact resistance 0.20J, F, Indoor, CE  |
| Colour of the housing:                              | traffic white RAL 9016                                                                                              |
| Weight (net) (kg):                                  | 1.9                                                                                                                 |
| Dimensions LxWxH/DxH (mm):                          | 373 x 125                                                                                                           |
| Cable entry KE X/Y (mm):                            | 77 / 0                                                                                                              |
| mounting method:                                    | Surface single mounting, Wall surface-mounting                                                                      |
| EAN-number:                                         | 4020863334247                                                                                                       |
| Commodity code:                                     | 94051040                                                                                                            |

## WBLR/400 LED 1900lm 830 • vw • EM pack 3h • 25330124110



**Lighting technology**  
Diffuser, opal-direct/indirect distribution  
WBLR/400 LED 1900 lm 830

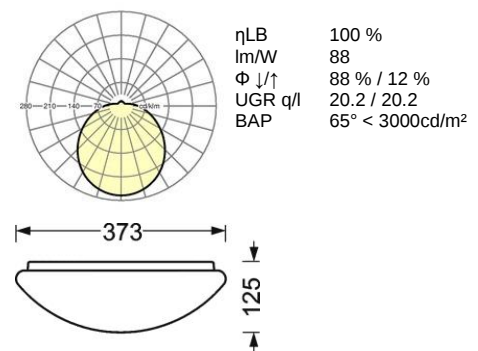

diffuser luminaire; Round luminaire housing made of deep-drawn sheet steel; Housing colour traffic white RAL 9016; Round domed acrylic glass diffuser, with opal matt smooth surface. Electrical connection and connection for emergency light using 5-pole connection terminal with plug-in contacts.

Dimensions LxWxH/DxH (mm): 373 x 125  
Cable entry KE X/Y (mm): 77 / 0  
Configuration: Lamps integrated: LED, Light colour 830/warm white (3000K), Colour rendering Ra=80; LED service life 50000h L80/B10  
Luminaire luminous flux (lm): 1900  
lm/W: 88  
Operating device: Electronic driver emergency light 3 hours (1 pcs.)  
System performance (W): 22  
Ballast lumen factor BLF (emergency lighting mode): 5.8  
Impact resistance (IK rating): IK02 TA+25°C  
Certifications: IP 40, protection class I, BAP 65°<3000, Glow-wire flammability test 650°C, Impact resistance 0.20J, F, Indoor, CE

Regiolux GmbH  
Type: WBLR/400 LED 1900 830 NL-B3 vw  
Article number: 25330124110  
Product deep link: <http://www.regiolux.de/en/article/25330124110>  
5 year guarantee after registration on website.