


Datasheet


REGIOLUX

Category (ETIM):	Recessed luminaire
Type:	hokal-HLEX LED
Order number:	60523026660
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	42
Luminaire luminous flux (lm):	4000
lm/W:	96
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<1500, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	3.63
Dimensions LxWxH/DxH (mm):	1476 x 84 x 76
Depth (mm):	72
Ceiling system:	cut-out ceilings [AD], Panel ceiling [PD] (module 100)
Necessary depth min. (mm):	155(AD)
Ceiling cut-out LxW/D (mm):	x 74
mounting method:	Ceiling recessing single mounting, Ceiling recessing light run mounting
EAN-number:	4020863306725
Commodity code:	94051098


hokal-HLEX/1500-1 LED 4000lm 840 • vw • DALI • 60523026660

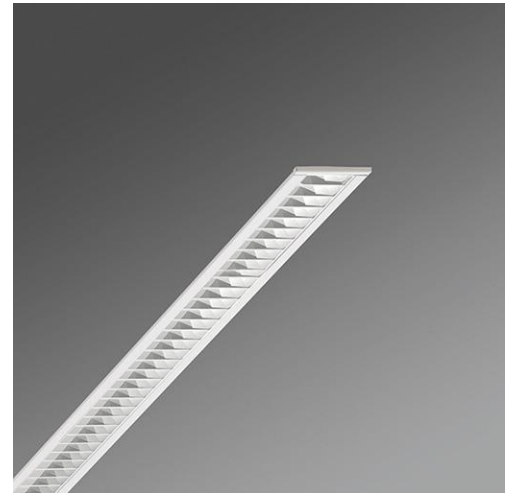

Lighting technology
Micro-parabolic louvre, silky matt-direct distribution
HLEX/1500-1 LED 4000 lm 840



ηLB	100 %
lm/W	96
Φ ↓/↑	100 % / 0 %
UGR q/l	20.7 / 19.9
BAP	65° < 1500cd/m²



Recessed luminaire; Sheet steel housing suitable for recessed ceilings and panel ceilings; prepared for fixing of end faces or for mounting in light run arrangements; white coated, similar to RAL 9016; Housing colour traffic white RAL 9016; Direct light distribution using highly reflective aluminium parabolic louvre, silk-matt with low profile louvres, light reflection factor 97%, suitable for VDU workstations, 65° < 1500 cd/m² omnidirectional glare suppression according to the current DIN EN 12464-1 standard, self-engaging, louvre is visually seamless for continuous mounting; Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts. Integrated driver. Accessories required: end faces and universal attachment clips UBD for recessed ceilings or WSPHL for panel ceilings; please order separately.

Dimensions LxWxH/DxH (mm): 1476 x 84 x 76
Ceiling system: cut-out ceilings [AD], Panel ceiling [PD] (module 100)
Necessary depth min. (mm): 155(AD)
Ceiling cut-out LxW/D (mm): x 74
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4000
lm/W: 96
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 42
Energy efficiency class: A+
Certifications: IP 20, protection class I, BAP 65°<1500, F, Indoor, CE



Regiolux GmbH
Type: hokal-HLEX/1500-1 LED 4000 840 DALI vw
Article number: 60523026660
Product deep link: <http://www.regiolux.de/en/article/60523026660>
5 year guarantee after registration on website.