


Category (ETIM):	Device mounts
Type:	Device mount IP20-SDGLDA LED
Order number:	18364374100
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver emergency light 3 hours (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	32
Ballast lumen factor BLF (emergency lighting mode):	14.1
Luminaire luminous flux (lm):	4800
lm/W:	150
Certifications:	IP 20, protection class I, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	2.518
Dimensions LxWxH/DxH (mm):	1531 x 63 x 46
mounting method:	Mounting rail system mounting
EAN-number:	4020863337057
Commodity code:	94051098

SDGLDA LED 4800lm 840 • vw • EM pack 3h • 18364374100



Lighting technology
Linear.Lens.Profil-direct Batwing distribution
SDGLDA LED 4800 lm 840

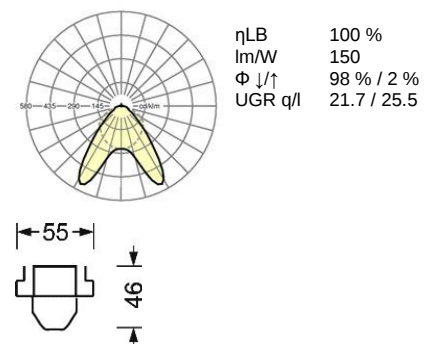

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated lateral lever locks. LED unit in housing length for optically seamless light run. Housing colour traffic white RAL 9016; Direct, double asymmetric light distribution using Linear.Lens.Profil made of matt PMMA plastic. Optically seamless light run. With 3 hours emergency lighting battery and integrated status indicator; 3 hours emergency lighting operation. Heat-resistant cables including permanently fixed, 4-pole quick-mounting plug connector with tool-less phase pre-selection and locating finger; one wire from the through-wiring can be used as unswitched charging phase using an additional pole on the plug connector;

Dimensions LxWxH/DxH (mm): 1531 x 63 x 46
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4800
lm/W: 150
Operating device: Electronic driver emergency light 3 hours (1 pcs.)
System performance (W): 32
Ballast lumen factor BLF (emergency lighting mode): 14.1
Certifications: IP 20, protection class I, F, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGLDA LED 4800 840 NL-B3 vw
Article number: 18364374100
Product deep link: <http://www.regiolux.de/de/article/18364374100>
5 year guarantee after registration on website.