



Category (ETIM):	Recessed luminaire
Type:	RSEX LED
Order number:	71310304160
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Operating device:	Electronic driver (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	35
Luminaire luminous flux (lm):	4000
lm/W:	116
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<1000, F, F-roof, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	6.3
Dimensions LxWxD (mm):	1547 x 310 x 58
Depth (mm):	51
Ceiling system:	Ceilings with visible T-rails [s-TS] (312.5x1550mm), Concealed symmetrical rail construction [VS] (312.5x1550mm), cut-out ceilings [AD]
Necessary depth min. (mm):	120(AD); 170(s-TS); 120(VS)
Ceiling cut-out LxW/D (mm):	1480 x 275
mounting method:	Ceiling recessing single mounting
EAN-number:	4020863317226
Commodity code:	94051098

RSEX/312 -1550 LED 4000lm 840 • vw • ED
• 71310304160

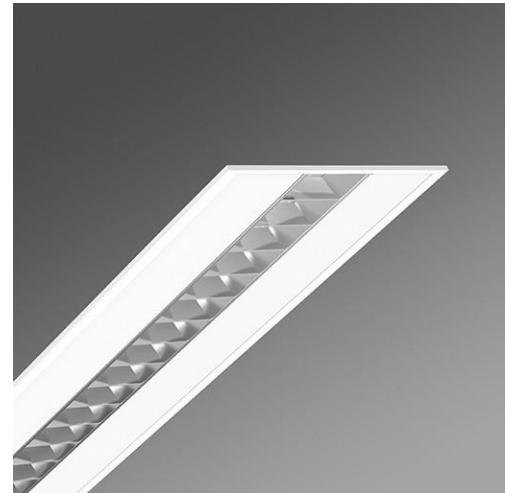

Lighting technology
 Parabolic louvre, silky matt-direct distribution
 RSEX/312 -1550 LED 4000 lm 840

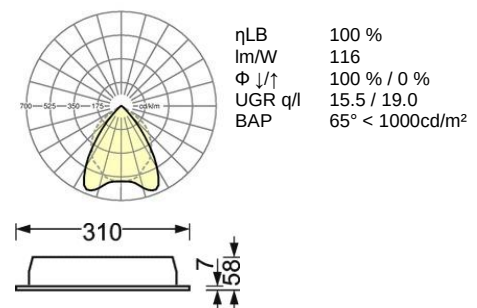

Recessed luminaire; Sheet steel housing with uniformly wide circumferential edge and 7 mm raised edges for ceilings with visible T-rails, concealed symmetrical rail constructions and recessed ceilings; Housing colour traffic white RAL 9016; Direct light distribution using reflectivity-enhanced silk matt, anodised aluminium parabolic louvre, for workstations, 65° < 1000 cd/m² omnidirectional glare suppression according to current DIN EN 12464-1 standard, self-engaging, can be folded down on both sides; Electrical connection via 3-pole connection terminal with plug-in contacts. UBB T5 LED universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT CLIPS securing clips for ceilings with visible T rails: please order separately.

Dimensions LxWxD (mm): 1547 x 310 x 58
 Ceiling system: Ceilings with visible T-rails [s-TS] (312.5x1550mm), Concealed symmetrical rail construction [VS] (312.5x1550mm), cut-out ceilings [AD]
 Necessary depth min. (mm): 120(AD); 170(s-TS); 120(VS)
 Ceiling cut-out LxW/D (mm): 1480 x 275
 Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
 Luminaire luminous flux (lm): 4000
 lm/W: 116
 Operating device: Electronic driver (1 pcs.)
 System performance (W): 35
 Energy efficiency class: A+
 Certifications: IP 20, protection class I, BAP 65°<1000, F, F-roof, Indoor, CE

Regiolux GmbH
 Type: RSEX/312 -1550 LED 4000 840 ET vw
 Article number: 71310304160
 Product deep link: <http://www.regiolux.de/en/article/71310304160>
 5 year guarantee after registration on website.

