


Category (ETIM):	Sports hall luminaire
Type:	THLE LED
Order number:	78130034100
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Operating device:	Electronic driver (3 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	128
Luminaire luminous flux (lm):	14600
lm/W:	114
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, F, Tennis ball impact resistance, Protection against flying balls, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	19.1
Dimensions LxWxD (mm):	1548 x 484 x 90
Depth (mm):	83
Ceiling system:	Concealed symmetrical rail construction [VS], cut-out ceilings [AD]
Necessary depth min. (mm):	250(AD)
Ceiling cut-out LxW/D (mm):	1535 x 470
mounting method:	Ceiling recessing single mounting
EAN-number:	4020863317394
Commodity code:	94051098

THLE/1500-3 LED 14600lm 840 • vw • ED • 78130034100



Lighting technology
 Louvre, white-direct wide distribution
 THLE/1500-3 LED 14600 lm 840

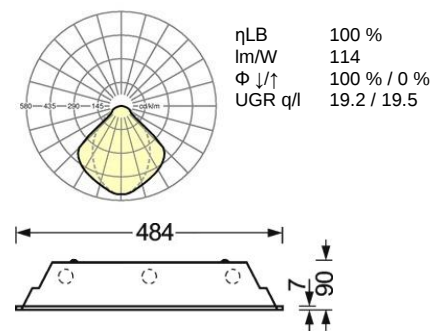

Sports hall luminaire; Sheet steel housing with uniformly wide all-round edge and 7 mm raised edges for concealed symmetrical rail constructions and recessed ceilings; Housing colour: traffic white RAL 9016; Direct wide-beam light distribution using sheet steel metal louvre with stable, smooth cross blades; painted white similar to RAL 9016; with V reflector, can be folded down on one side; ball-proof. Louvre fastening is via spring-loaded ball-proof catches that can only be opened with tools; Wiring in two-group series; grouping of the LED units 1 x inner / 2x outer; electrical connection via 5-pole connection terminal with plug-in contacts. Mounting bracket BBT for concealed symmetrical rail constructions or recessed ceiling, order separately.

Dimensions LxWxD (mm): 1548 x 484 x 90
 Ceiling system: Concealed symmetrical rail construction [VS], cut-out ceilings [AD]
 Necessary depth min. (mm): 250(AD)
 Ceiling cut-out LxW/D (mm): 1535 x 470
 Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
 Luminaire luminous flux (lm): 14600
 lm/W: 114
 Operating device: Electronic driver (3 pcs.)
 System performance (W): 128
 Energy efficiency class: A+
 Certifications: IP 20, protection class I, F, Tennis ball impact resistance, Protection against flying balls, Indoor, CE

Regiolux GmbH
 Type: THLE/1500-3 LED 14600 840 ET vw
 Article number: 78130034100
 Product deep link: <http://www.regiolux.de/en/article/78130034100>
 5 year guarantee after registration on website.

