


Category (ETIM):	Recessed luminaire
Type:	protection-PREO LED
Order number:	72532036680
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	40
Luminaire luminous flux (lm):	4300
lm/W:	107
Energy efficiency class:	A++
Certifications:	IP 54, protection class I, F, F-roof, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	6.65
Dimensions LxWxD (mm):	1197 x 297 x 89
Depth (mm):	82
Ceiling system:	Ceilings with visible T-rails [s-TS] (300x1200mm), Concealed symmetrical rail construction [VS] (300x1200mm), cut-out ceilings [AD]
Necessary depth min. (mm):	150(AD); 250(s-TS); 150(s-TS min); 150(VS)
Ceiling cut-out LxW/D (mm):	1185 x 285
mounting method:	Ceiling recessing single mounting
EAN-number:	4020863289882
Commodity code:	94051098

protection-PREO/300-1200 IP54 LED 4300lm 840 • vw • DALI • 72532036680



Lighting technology
Diffuser, opal-direct distribution
PREO/300-1200 IP54 LED 4300 lm 840

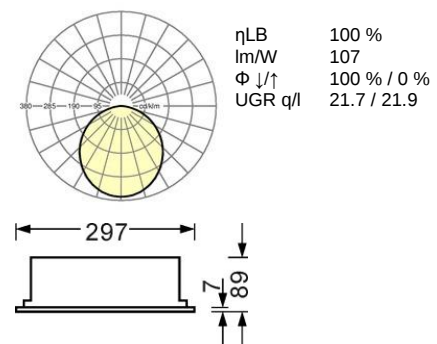

Recessed luminaire; Sheet steel housing suitable for ceilings with visible T rails, concealed symmetrical rail constructions and recessed ceilings; protection rating refers to visible luminaire surface; Housing colour traffic white RAL 9016; Direct light distribution using opal diffuser made of acrylic glass with natural anodised aluminium frame; neutral white light colour (840) with very good colour consistency and high colour rendering Ra>80; Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts. UBB universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT CLIPS locking clips for ceilings with visible T rails: please order separately. A vacuum lifting pad SH 55 is needed to draw off the sealing frame.

Dimensions LxWxD (mm): 1197 x 297 x 89
Ceiling system: Ceilings with visible T-rails [s-TS] (300x1200mm), Concealed symmetrical rail construction [VS] (300x1200mm), cut-out ceilings [AD]
Necessary depth min. (mm): 150(AD); 250(s-TS); 150(s-TS min); 150(VS)
Ceiling cut-out LxW/D (mm): 1185 x 285
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4300
lm/W: 107
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 40
Energy efficiency class: A++
Certifications: IP 54, protection class I, F, F-roof, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: protection-PREO/300-1200 IP54 LED 4300 840 DALI vw
Article number: 72532036680
Product deep link: <http://www.regiolux.de/en/article/72532036680>
5 year guarantee after registration on website.

