

Datasheet


REGIOLUX

Category (ETIM):	Mounted luminaire
Type:	hokal-HLAX LED
Order number:	60503026660
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	42
Luminaire luminous flux (lm):	4000
lm/W:	96
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<1500, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	3.575
Dimensions LxWxDxH (mm):	1476 x 85 x 75
Cable entry KE X/Y (mm):	0 / 0
mounting method:	Surface single mounting, Surface light run mounting, Mounting rail mounting, Suspended single mounting, Suspended / light run mounting
EAN-number:	4020863306374
Commodity code:	94051098

hokal-HLAX/1500 LED 4000lm 840 • vw • DALI • 60503026660



Lighting technology
Micro-parabolic louvre, silky matt-direct distribution
HLAX/1500 LED 4000 lm 840

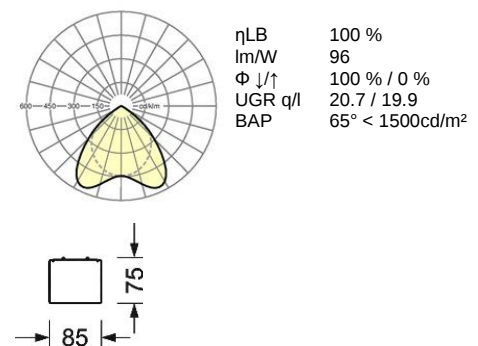

Mounted luminaire; Sheet steel housing with square design; prepared for fixing end faces or luminaire connectors made of steel; Housing colour traffic white RAL 9016; Direct light distribution using highly reflective aluminium parabolic louvre, silk-matt with low profile louvres, light reflection factor 97%, suitable for VDU workstations, 65° < 1500 cd/m² omnidirectional glare suppression according to the current DIN EN 12464-1 standard, self-engaging, louvre is visually seamless for continuous mounting. Electrical connection via 5-pole connection terminal with plug-in contacts. Required accessories: order end faces, connectors and through-wiring separately according to luminaire arrangements. Mounting on mounting rail possible. Required accessories are available on request.

Dimensions LxWxDxH (mm): 1476 x 85 x 75
Cable entry KE X/Y (mm): 0 / 0
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4000
lm/W: 96
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 42
Energy efficiency class: A+
Certifications: IP 20, protection class I, BAP 65°<1500, F, Indoor, CE

Regiolux GmbH
Type: hokal-HLAX/1500 LED 4000 840 DALI vw
Article number: 60503026660
Product deep link: <http://www.regiolux.de/en/article/60503026660>
5 year guarantee after registration on website.

