


Category (ETIM):	diffuser luminaire
Type:	WBLR LED
Order number:	25340154110
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Operating device:	Electronic driver + motion sensor S9 (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	29
Luminaire luminous flux (lm):	2800
lm/W:	96
Impact resistance (IK rating):	IK02 TA+25°C
Certifications:	IP 40, protection class I, BAP 65°<3000, Glow-wire flammability test 650°C, Impact resistance 0.20J, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	2.6
Dimensions LxWxH/DxH (mm):	477 x 150
Cable entry KE X/Y (mm):	103 / 0
mounting method:	Surface single mounting, Wall surface-mounting
EAN-number:	4020863334315
Commodity code:	94051040

WBLR/500 LED 2800lm 840 • vw • S9 • 25340154110



Lighting technology
Diffuser, opal-direct/indirect distribution
WBLR/500 LED 2800 lm 840

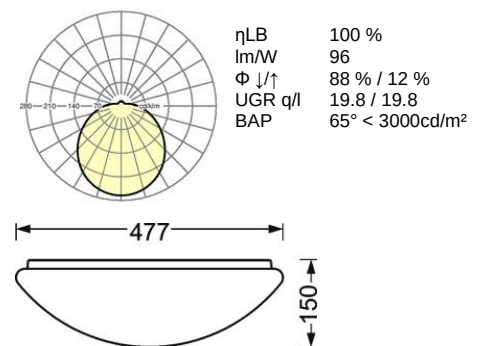

diffuser luminaire; Round luminaire housing made of deep-drawn sheet steel; Housing colour traffic white RAL 9016; Round domed acrylic glass diffuser, with opal matt smooth surface. With integrated HF motion sensor. Range 1 m - 8 m continuously adjustable. Coverage angle of 360° with a coverage area of 160°. Time setting 30 sec - 30 min. and brightness threshold value of 2 to 2000 lx. As master luminaire up to 1000 W (ohmic load). Electrical connection via 5-pole connection terminal with plug-in contacts.

Dimensions LxWxH/DxH (mm): 477 x 150
Cable entry KE X/Y (mm): 103 / 0
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 2800
lm/W: 96
Operating device: Electronic driver + motion sensor S9 (1 pcs.)
System performance (W): 29
Impact resistance (IK rating): IK02 TA+25°C
Certifications: IP 40, protection class I, BAP 65°<3000, Glow-wire flammability test 650°C, Impact resistance 0.20J, F, Indoor, CE

Regiolux GmbH
Type: WBLR/500 LED 2800 840 S9 vw
Article number: 25340154110
Product deep link: <http://www.regiolux.de/en/article/25340154110>
5 year guarantee after registration on website.