


|                               |                                                                                                                        |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Category (ETIM):              | Recessed downlight                                                                                                     |
| Type:                         | Ioda-LDESO LED                                                                                                         |
| Order number:                 | 37670104140                                                                                                            |
| Configuration:                | Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10 |
| Operating device:             | Electronic driver (1 pcs.)                                                                                             |
| Mains voltage:                | 230V / 50Hz                                                                                                            |
| System performance (W):       | 25                                                                                                                     |
| Luminaire luminous flux (lm): | 2600                                                                                                                   |
| lm/W:                         | 106                                                                                                                    |
| Energy efficiency class:      | A+                                                                                                                     |
| Certifications:               | IP 44, protection class I, F, Indoor, CE                                                                               |
| Colour of the housing:        | white                                                                                                                  |
| Weight (net) (kg):            | 1.1                                                                                                                    |
| Dimensions LxWxH/DxH (mm):    | 204 x 74                                                                                                               |
| Depth (mm):                   | 74                                                                                                                     |
| Ceiling system:               | cut-out ceilings [AD]                                                                                                  |
| Necessary depth min. (mm):    | 105(AD)                                                                                                                |
| Ceiling cut-out LxW/D (mm):   | 190                                                                                                                    |
| mounting method:              | Ceiling recessing single mounting                                                                                      |
| EAN-number:                   | 4020863324545                                                                                                          |
| Commodity code:               | 94051098                                                                                                               |

## Ioda-LDESO LED 2600lm 840 • ws • ED • 37670104140



**Lighting technology**  
Diffuser, opal-direct wide distribution  
LDESO LED 2600 lm 840

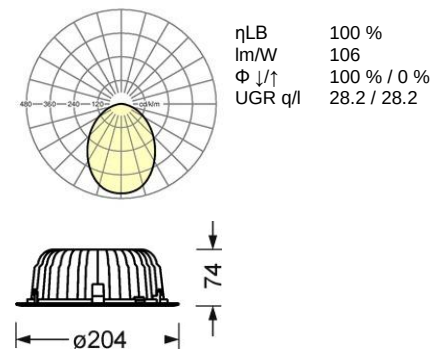

Recessed downlight; Housing made of die-cast aluminium, painted in RAL 9016 traffic white, connection of LED unit and LED holder without tools, aluminium heat sink for effective passive cooling, plastic cover ring with opal diffuser. With fixing springs for installation without tools, suitable for ceiling thickness of 10 mm – 20 mm. Housing colour white; Direct, wide-beam light distribution by means of a satined diffuser and narrow cover ring. Integrated LED driver with luminaire wired ready for operation. Electrical connection via 1.0 m long connection cable, 2x 0.75 mm<sup>2</sup>.

Dimensions LxWxH/DxH (mm): 204 x 74  
Ceiling system: cut-out ceilings [AD]  
Necessary depth min. (mm): 105(AD)  
Ceiling cut-out LxW/D (mm): 190  
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10  
Luminaire luminous flux (lm): 2600  
lm/W: 106  
Operating device: Electronic driver (1 pcs.)  
System performance (W): 25  
Energy efficiency class: A+  
Certifications: IP 44, protection class I, F, Indoor, CE

Regiolux GmbH  
Type: Ioda-LDESO LED 2600 840 ET ws  
Article number: 37670104140  
Product deep link: <http://www.regiolux.de/en/article/37670104140>  
5 year guarantee after registration on website.