


Category (ETIM):	Mounted luminaire
Type:	protection-PRAO LED
Order number:	62000016680
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	37
Luminaire luminous flux (lm):	4700
lm/W:	125
Energy efficiency class:	A+
Certifications:	IP 54, protection class I, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	7.9
Dimensions LxWxH/DxH (mm):	665 x 654 x 90
Cable entry KE X/Y (mm):	0 / 15
mounting method:	Surface single mounting
EAN-number:	4020863289196
Commodity code:	94051098

protection-PRAO 660 IP54 LED 4700lm 840 • vw • DALI • 62000016680




Lighting technology

Diffuser, opal-direct distribution
PRAO 660 IP54 LED 4700 lm 840

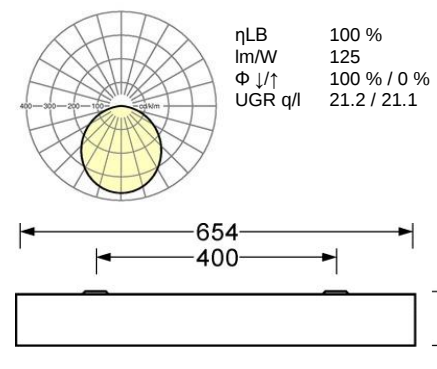

Mounted luminaire; Sheet steel housing, rectangular cross section; Housing colour traffic white RAL 9016; Direct light distribution using opal diffuser made of acrylic glass with natural anodised aluminium frame; neutral white light colour (840) with very good colour consistency and high colour rendering Ra>80; Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts.

Dimensions LxWxH/DxH (mm): 665 x 654 x 90
Cable entry KE X/Y (mm): 0 / 15
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4700
lm/W: 125
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 37
Energy efficiency class: A+
Certifications: IP 54, protection class I, F, DIN10500/Food, Indoor, CE

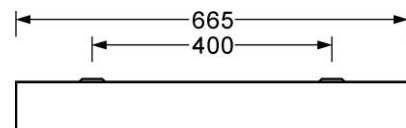

Regiolux GmbH

Type: protection-PRAO 660 IP54 LED 4700 840 DALI vw

Article number: 62000016680

Product deep link: <http://www.regiolux.de/en/article/62000016680>

5 year guarantee after registration on website.