


Category (ETIM):	Recessed luminaire
Type:	protection-PREG LED
Order number:	72532036610
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	40
Luminaire luminous flux (lm):	4700
lm/W:	118
Energy efficiency class:	A++
Certifications:	IP 54, protection class I, F, F-roof, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	6.65
Dimensions LxWxD (mm):	1197 x 297 x 89
Depth (mm):	82
Ceiling system:	Ceilings with visible T-rails [s-TS] (300x1200mm), Concealed symmetrical rail construction [VS] (300x1200mm), cut-out ceilings [AD]
Necessary depth min. (mm):	150(AD); 250(s-TS); 150(s-TS min); 150(VS)
Ceiling cut-out LxW/D (mm):	1185 x 285
mounting method:	Ceiling recessing single mounting
EAN-number:	4020863289905
Commodity code:	94051098

protection-PREG/300-1200 IP54 LED 4700lm 840 • vw • DALI • 72532036610



Lighting technology
Diffuser, satined-direct distribution
PREG/300-1200 IP54 LED 4700 lm 840

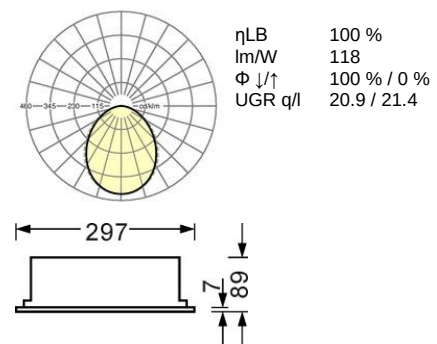

Recessed luminaire; Sheet steel housing suitable for ceilings with visible T rails, concealed symmetrical rail constructions and recessed ceilings; protection rating refers to visible luminaire surface; Housing colour traffic white RAL 9016; Direct diffuse light distribution using diffuse-radiation frosted diffuser made of acrylic glass with naturally anodised aluminium frame, neutral white light colour (840) with very good colour consistency and high colour rendering Ra>80. Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts. UBB universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT CLIPS locking clips for ceilings with visible T rails: please order separately. A vacuum lifting pad SH 55 is needed to draw off the sealing frame.

Dimensions LxWxD (mm): 1197 x 297 x 89
 Ceiling system: Ceilings with visible T-rails [s-TS] (300x1200mm), Concealed symmetrical rail construction [VS] (300x1200mm), cut-out ceilings [AD]
 Necessary depth min. (mm): 150(AD); 250(s-TS); 150(s-TS min); 150(VS)
 Ceiling cut-out LxW/D (mm): 1185 x 285
 Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
 Luminaire luminous flux (lm): 4700
 lm/W: 118
 Operating device: Electronic driver DALI (1 pcs.)
 System performance (W): 40
 Energy efficiency class: A++
 Certifications: IP 54, protection class I, F, F-roof, DIN10500/Food, Indoor, CE

Regiolux GmbH
 Type: protection-PREG/300-1200 IP54 LED 4700 840 DALI vw
 Article number: 72532036610
 Product deep link: <http://www.regiolux.de/en/article/72532036610>
 5 year guarantee after registration on website.

