


Category (ETIM):	Device mount IP 54
Type:	Device mount IP54-SDGSOH LED
Order number:	18640374100
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver emergency light 3 hours (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	56
Ballast lumen factor BLF (emergency lighting mode):	7.6
Luminaire luminous flux (lm):	8000
lm/W:	146
Certifications:	IP 54, protection class I, F, D, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	2.6
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
mounting method:	Mounting rail system mounting
EAN-number:	4020863326051
Commodity code:	94051098

SDGSOH LED 8000lm 840 • vw • EM pack 3h • 18640374100



Lighting technology
Individual.Lens.Optic-direct extremely narrow distribution
SDGSOH LED 8000 lm 840

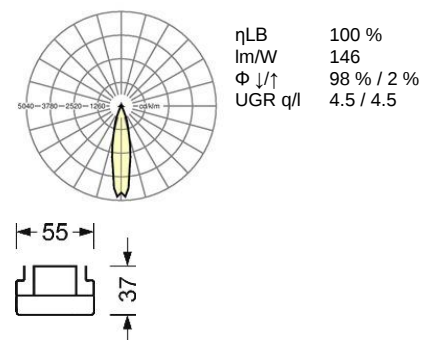

Quick-fit mounting system Device mount IP 54; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Lighttechnical element with transparent seal, end faces made of plastic, all-round closed seal to mounting rail. Housing colour traffic white RAL 9016; Extremely direct narrow-beam light distribution with controlled rack lighting using individual. lens. optic made of PMMA plastic. Continuous optics. Uniform LED spacing, even across circuit boards. 3-row LED arrangement. Light direction components are easy to maintain due to smooth surface which is easily cleaned. With 3 hours emergency lighting battery and integrated status indicator; 3 hours emergency lighting operation. Heat-resistant cables including permanently fixed, 4-pole quick-mounting plug connector with tool-less phase pre-selection and locating finger; one wire from the through-wiring can be used as un-switched charging phase using an additional pole on the plug connector;

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 8000
lm/W: 146
Operating device: Electronic driver emergency light 3 hours (1 pcs.)
System performance (W): 56
Ballast lumen factor BLF (emergency lighting mode): 7.6
Certifications: IP 54, protection class I, F, D, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGSOH LED 8000 840 NL-B3 vw
Article number: 18640374100
Product deep link: <http://www.regiolux.de/de/article/18640374100>
5 year guarantee after registration on website.