

Datasheet


REGIOLUX

Category (ETIM):	Universal recessed luminaire
Type:	UEX LED
Order number:	76620506660
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	29
Luminaire luminous flux (lm):	4000
lm/W:	135
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<1000, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	3.9
Dimensions LxWxDxH (mm):	596.5 x 596.5 x 58
Depth (mm):	51
Ceiling system:	Ceilings with visible T-rails [s-TS] (600x600mm), Concealed symmetrical rail construction [VS] (600x600mm), cut-out ceilings [AD]
Necessary depth min. (mm):	120(AD); 250(s-TS); 140(s-TS min); 120(VS)
Ceiling cut-out LxW/D (mm):	585 x 585
mounting method:	Ceiling recessing single mounting
EAN-number:	4020863312573
Commodity code:	94051098

UEX/600 LED 4000lm 840 • vw • DALI • 76620506660



Lighting technology
Parabolic louvre, silky matt-direct distribution
UEX/600 LED 4000 lm 840

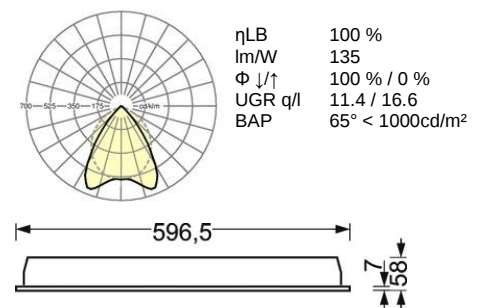

Universal recessed luminaire; Sheet steel housing suitable for ceilings with visible T-rails, concealed symmetrical rail constructions and recessed ceilings; Housing colour traffic white RAL 9016; Direct light distribution using reflectivity-enhanced silk matt, anodised aluminium parabolic louvre, for workstations, 65° < 1000 cd/m² omnidirectional glare suppression according to current DIN EN 12464-1 standard, self-engaging, can be folded down on both sides; Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts. UBB T5 LED universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT CLIPS securing clips for ceilings with visible T rails: please order separately.

Dimensions LxWxDxH (mm): 596.5 x 596.5 x 58
Ceiling system: Ceilings with visible T-rails [s-TS] (600x600mm), Concealed symmetrical rail construction [VS] (600x600mm), cut-out ceilings [AD]
Necessary depth min. (mm): 120(AD); 250(s-TS); 140(s-TS min); 120(VS)
Ceiling cut-out LxW/D (mm): 585 x 585
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4000
lm/W: 135
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 29
Energy efficiency class: A+
Certifications: IP 20, protection class I, BAP 65°<1000, F, Indoor, CE

Regiolux GmbH
Type: UEX/600 LED 4000 840 DALI vw
Article number: 76620506660
Product deep link: <http://www.regiolux.de/en/article/76620506660>
5 year guarantee after registration on website.

