


Category (ETIM):	Recessed luminaire
Type:	protection-PREMP LED
Order number:	72560014150
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	37
Luminaire luminous flux (lm):	4200
lm/W:	112
Energy efficiency class:	A+
Certifications:	IP 54, protection class I, BAP 65°<3000, F, F-roof, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	5.3
Dimensions LxWxD (mm):	597 x 597 x 89
Depth (mm):	82
Ceiling system:	Ceilings with visible T-rails [s-TS] (600x600mm), Concealed symmetrical rail construction [VS] (600x600mm), cut-out ceilings [AD]
Necessary depth min. (mm):	150(AD); 250(s-TS); 150(s-TS min); 150(VS)
Ceiling cut-out LxW/D (mm):	585 x 585
mounting method:	Ceiling recessing single mounting
EAN-number:	4020863289318
Commodity code:	94051098

protection-PREMP/600 IP54 LED 4200lm 840 • vw • ED • 72560014150




Lighting technology

Diffuser, micro-prismatic-direct distribution
PREMP/600 IP54 LED 4200 lm 840



ηLB	100 %
lm/W	112
Φ ↓/↑	100 % / 0 %
UGR q/l	18.3 / 18.7
BAP	65° < 3000cd/m²

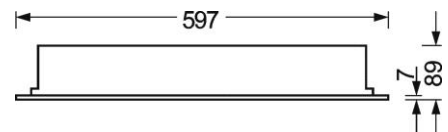

Recessed luminaire; Sheet steel housing suitable for ceilings with visible T rails, concealed symmetrical rail constructions and recessed ceilings; protection rating refers to visible luminaire surface; Housing colour traffic white RAL 9016; Direct light distribution using microprismatic pane made of acrylic glass with natural anodised aluminium frame; neutral white light colour (840) with very good colour consistency and high colour rendering Ra>80 for workstations, 65° < 3000 cd/m² with omnidirectional glare suppression according to current DIN-EN 12464-1 standard; Electrical connection via 3-pole connection terminal with plug-in contacts. UBM universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT locking clips for ceilings with visible T rails: please order separately.

Dimensions LxWxD (mm): 597 x 597 x 89

Ceiling system: Ceilings with visible T-rails [s-TS] (600x600mm), Concealed symmetrical rail construction [VS] (600x600mm), cut-out ceilings [AD]

Necessary depth min. (mm): 150(AD); 250(s-TS); 150(s-TS min); 150(VS)

Ceiling cut-out LxW/D (mm): 585 x 585

Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10

Luminaire luminous flux (lm): 4200

lm/W: 112

Operating device: Electronic driver (1 pcs.)

System performance (W): 37

Energy efficiency class: A+

Certifications: IP 54, protection class I, BAP 65°<3000, F, F-roof, DIN10500/Food, Indoor, CE

Regiolux GmbH

Type: protection-PREMP/600 IP54 LED 4200 840 ET vw

Article number: 72560014150

Product deep link: <http://www.regiolux.de/en/article/72560014150>

5 year guarantee after registration on website.

